


【書類名】 図面
【図】 1


Fig. 1

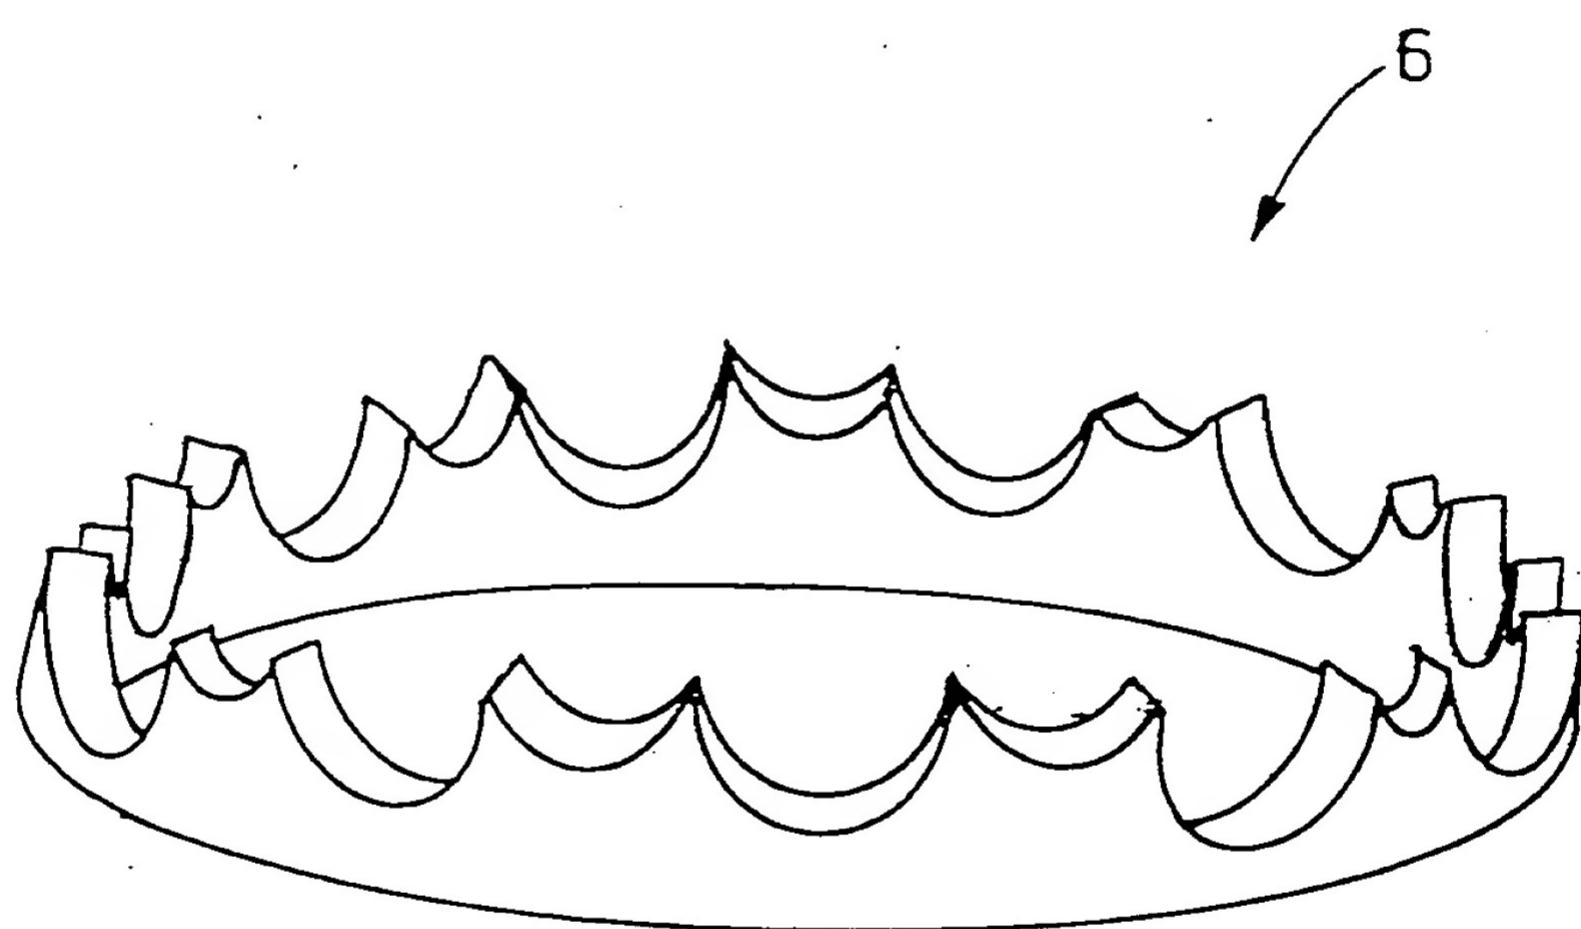

00000000000000000000000000000000

~~1 2~~

Fig. 2

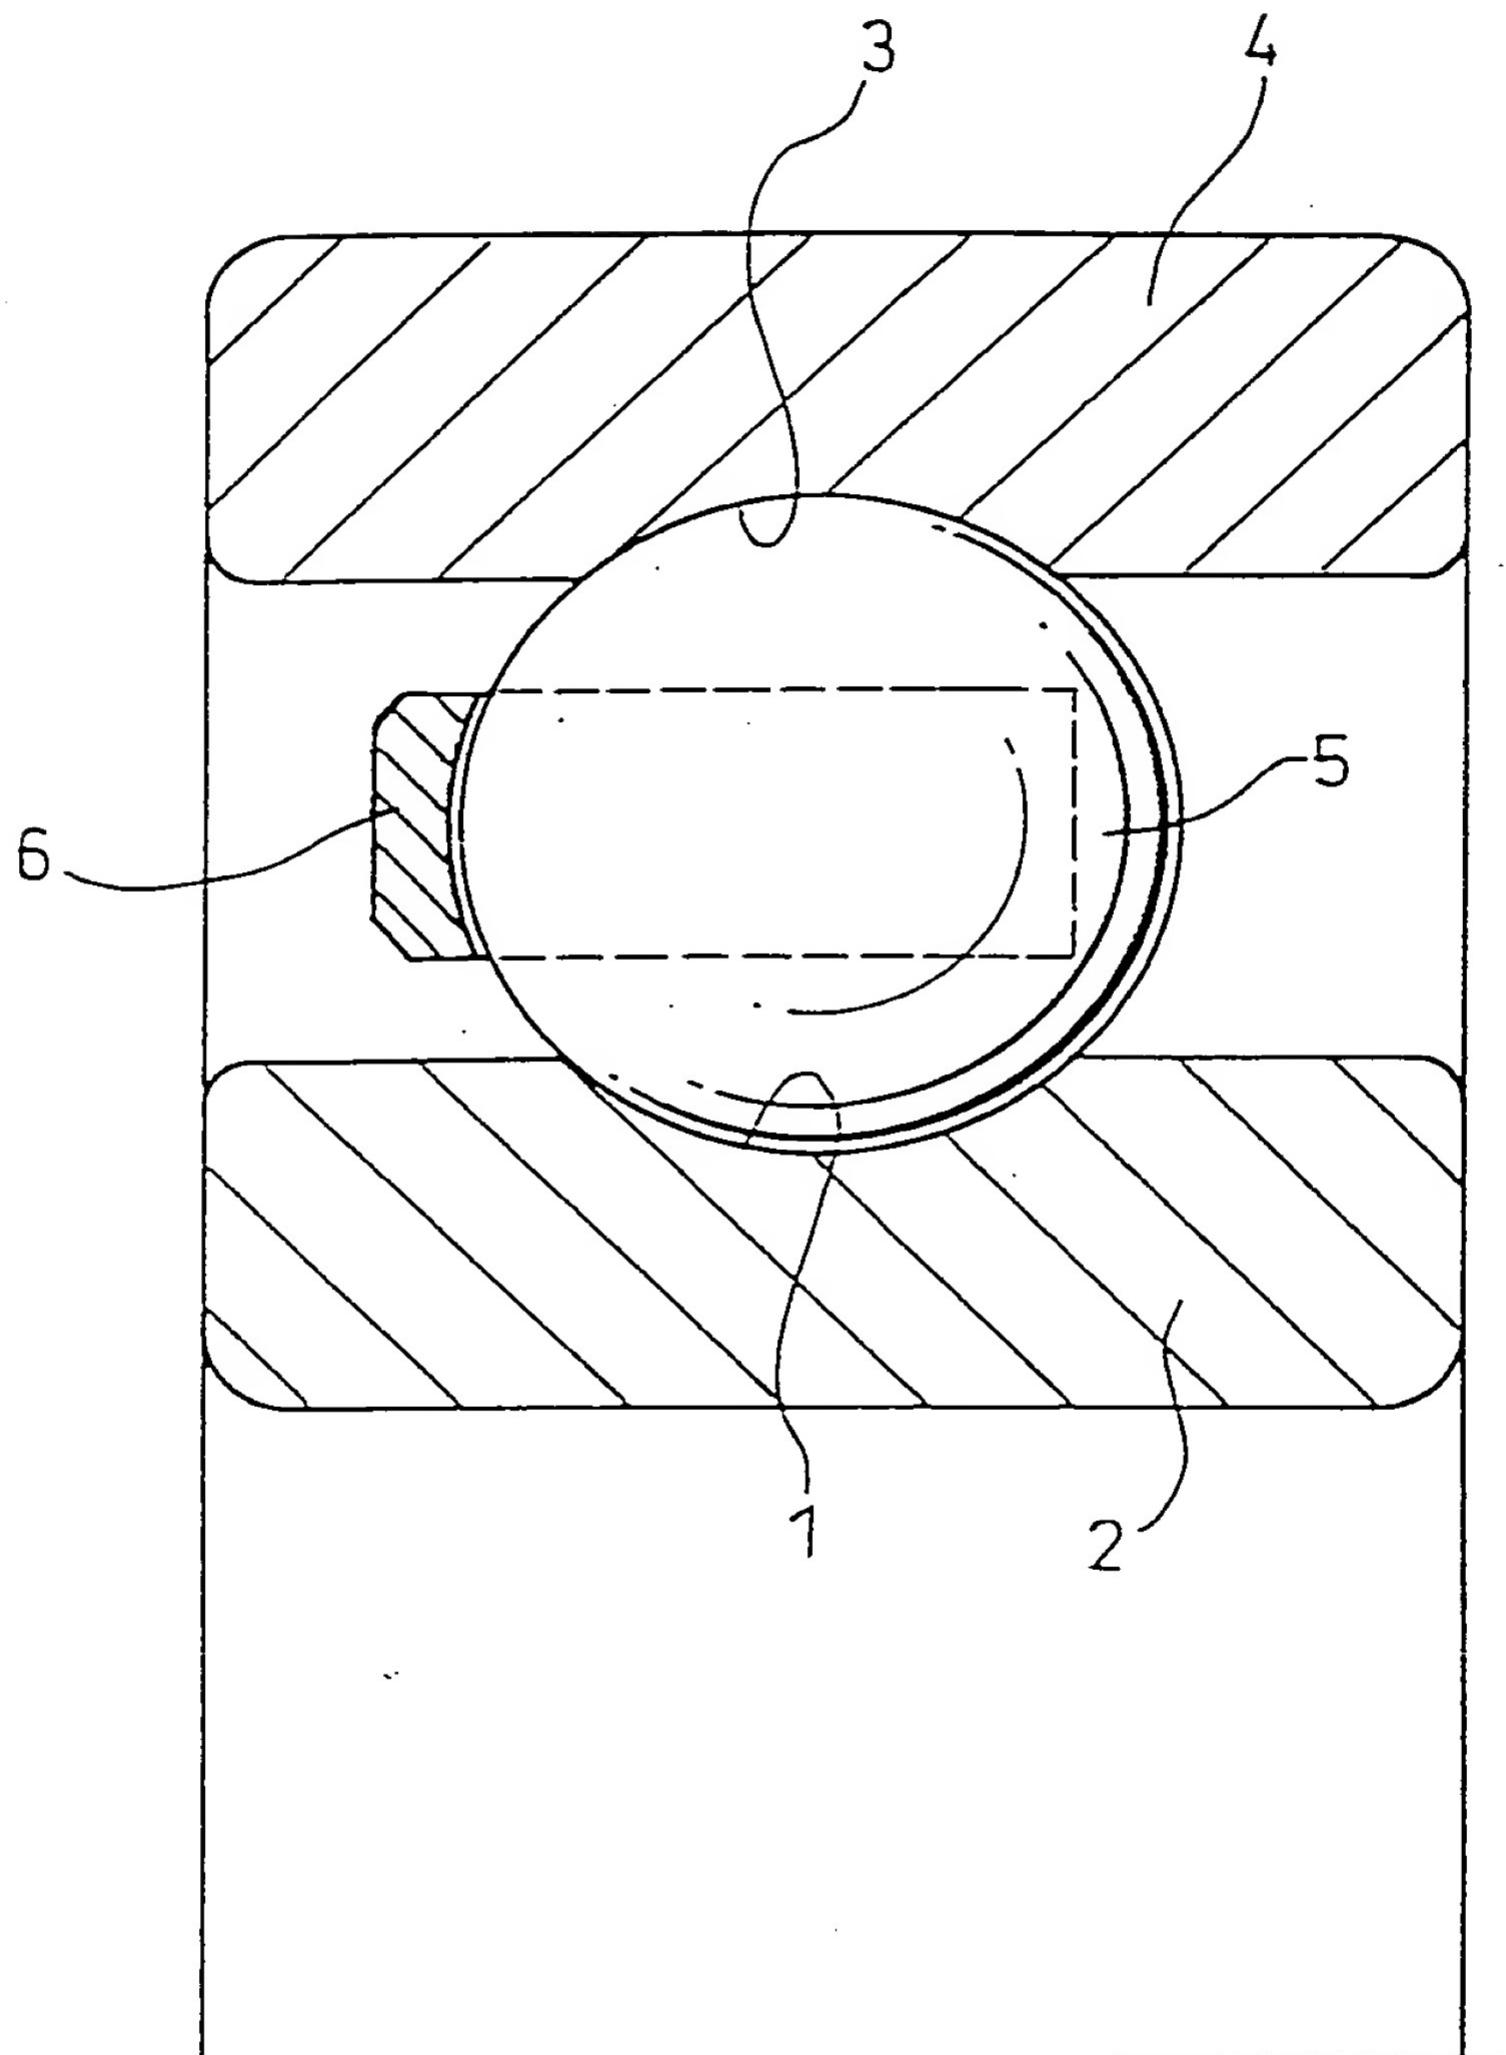


0 9 6 9 8 4 6 5 - 0 2 0 5 0 1

10050404000561136860

Fig. 3b

Fig. 3a

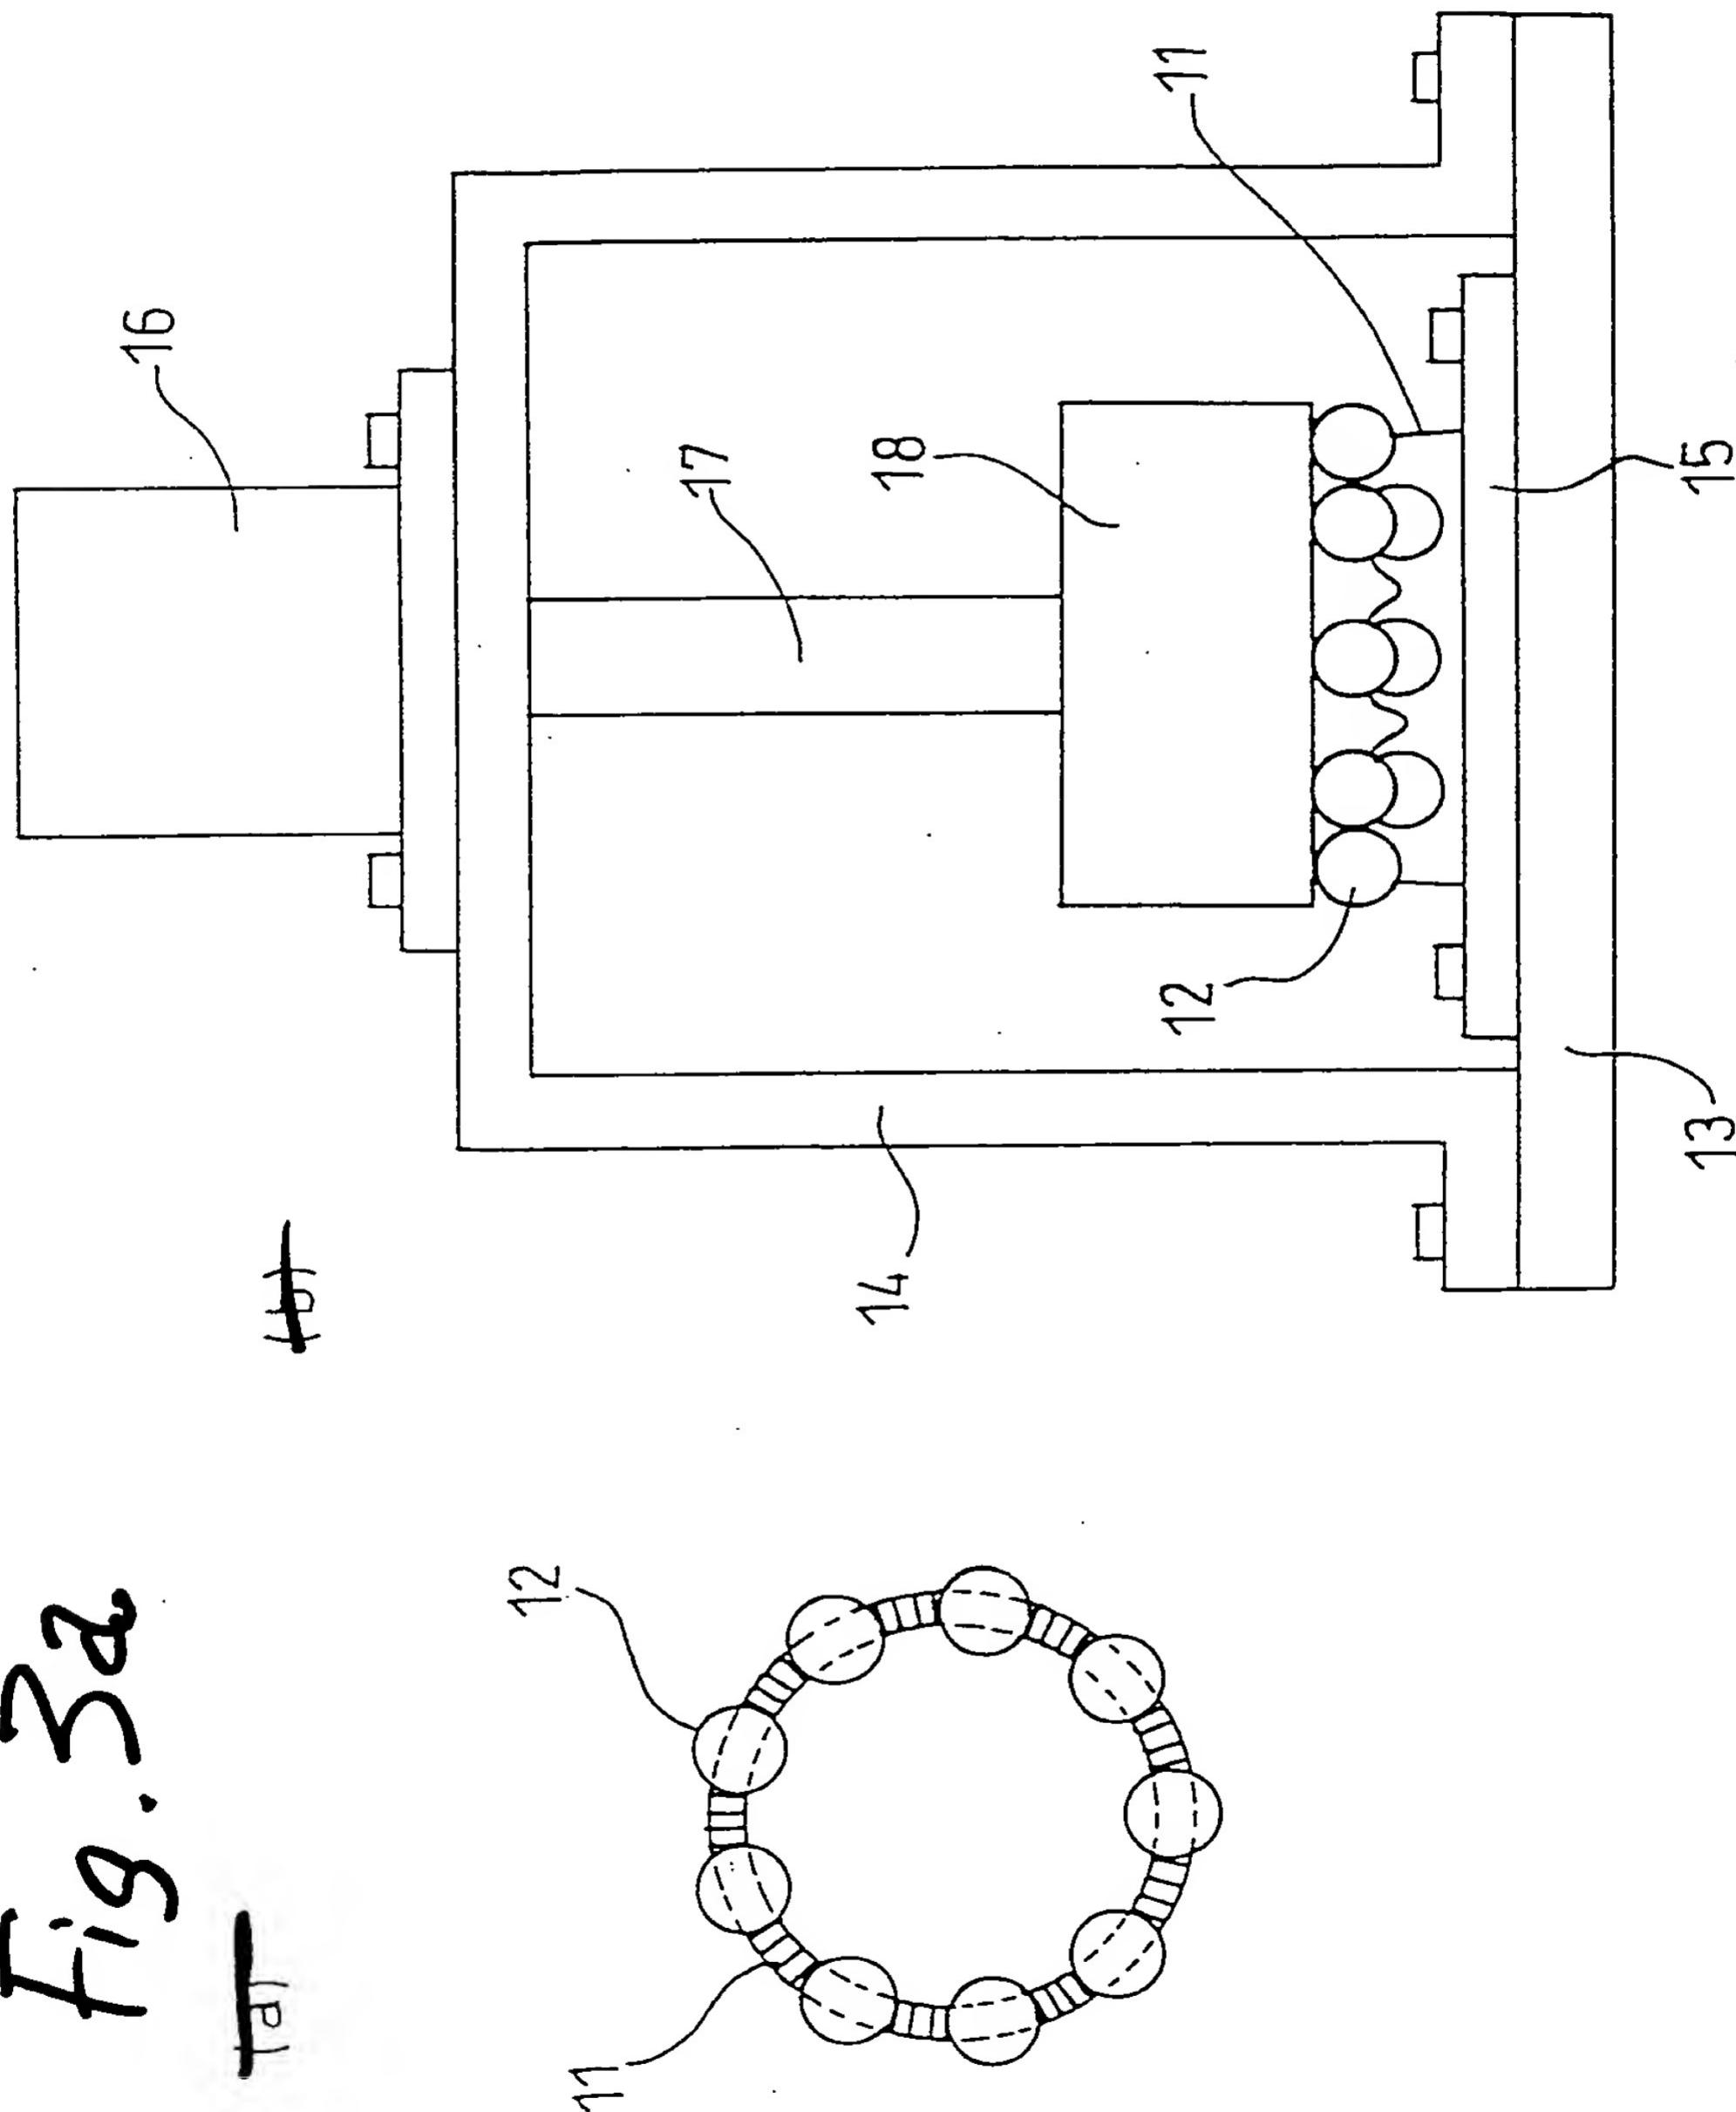

HAMAMOTO, et al Q65333
ROLLING BEARING
Filed: July 5, 2001
Darryl Mexic 202-293-7060
3 of 14

4

Fig. 4a


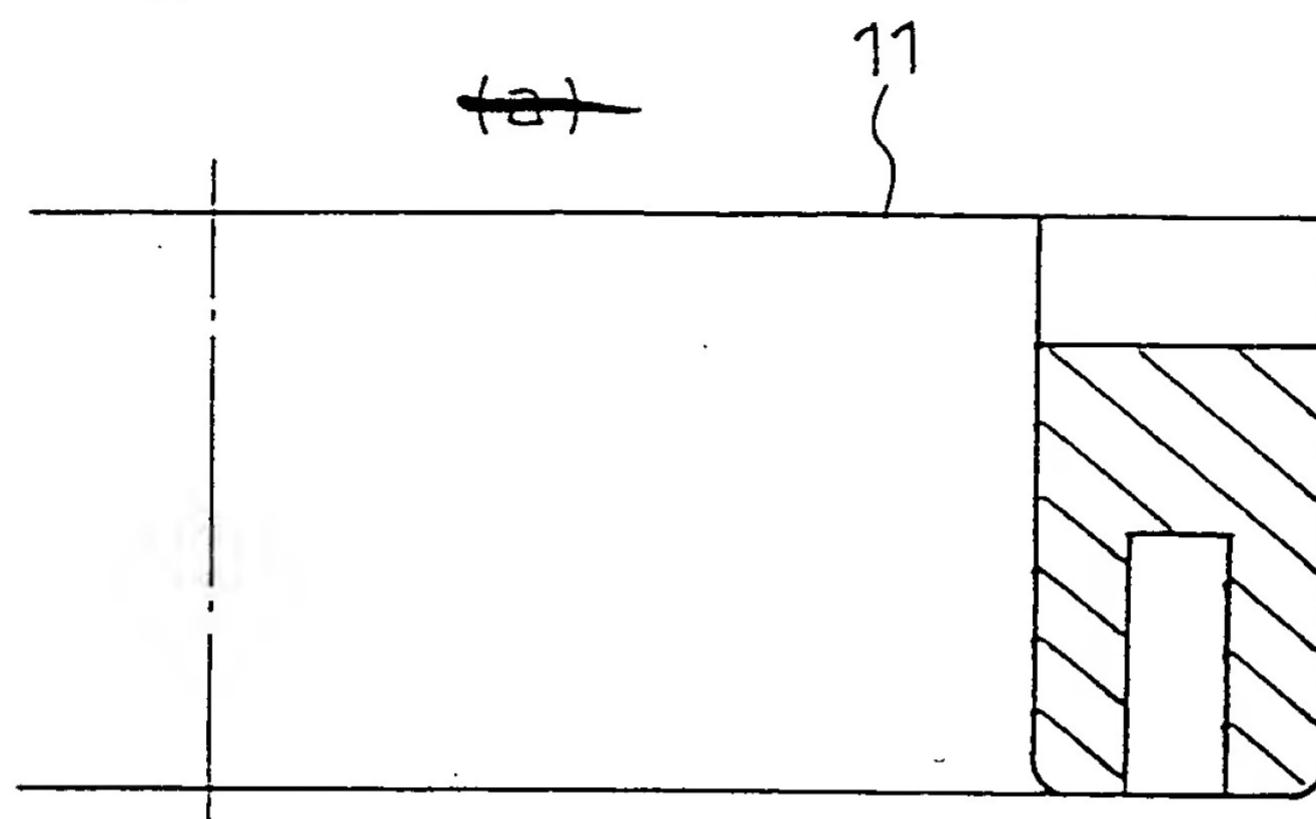


Fig. 4b

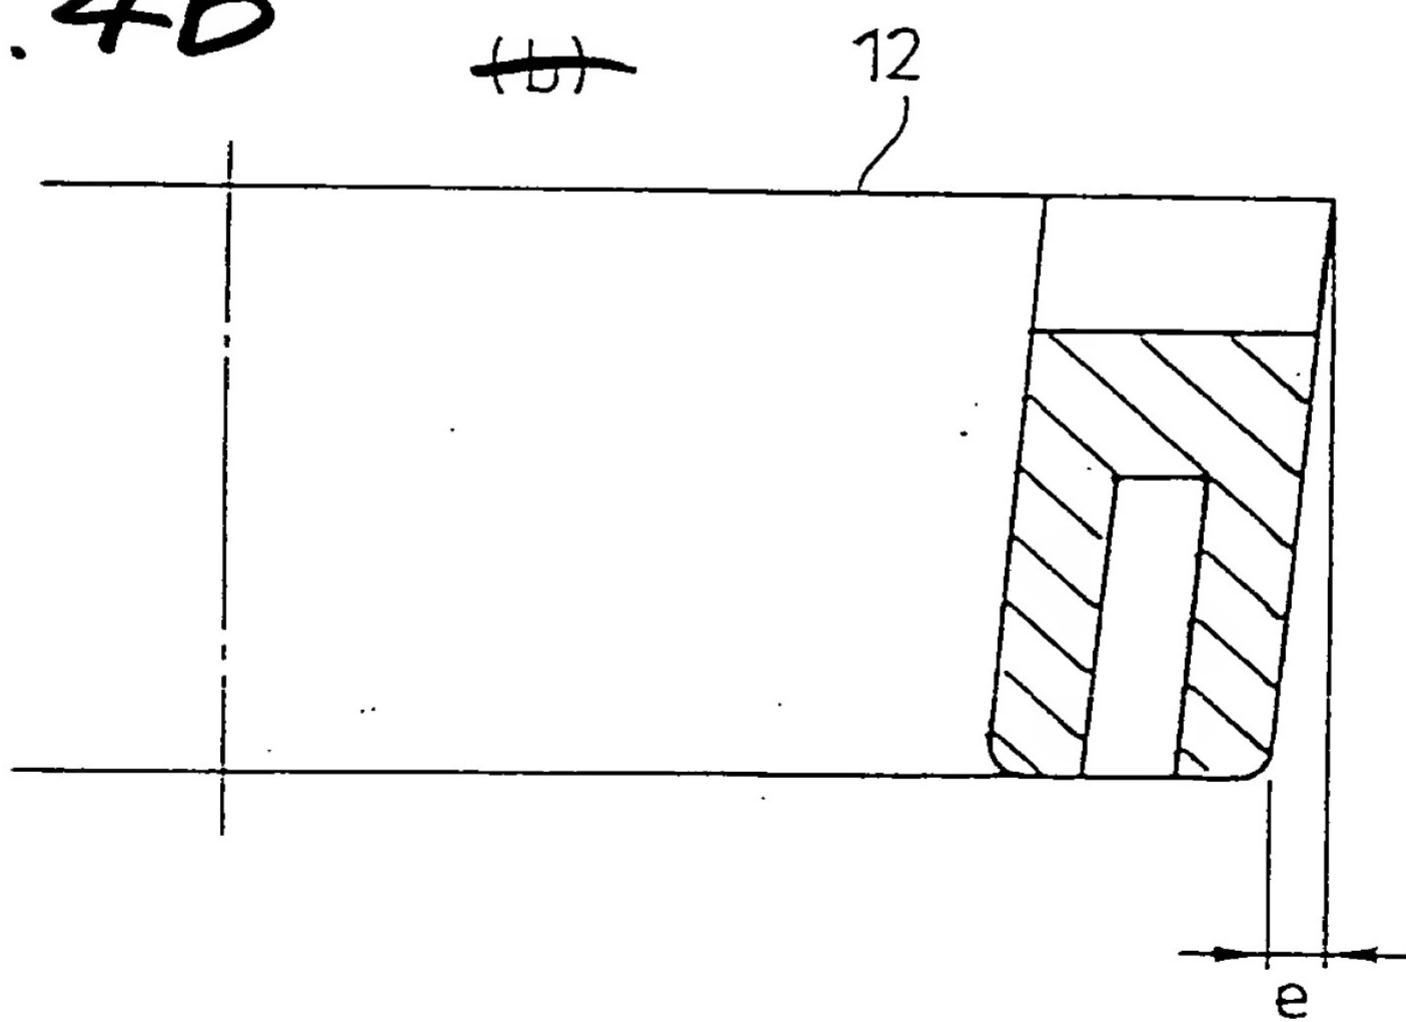

1050<0°-56186860

Fig. 5



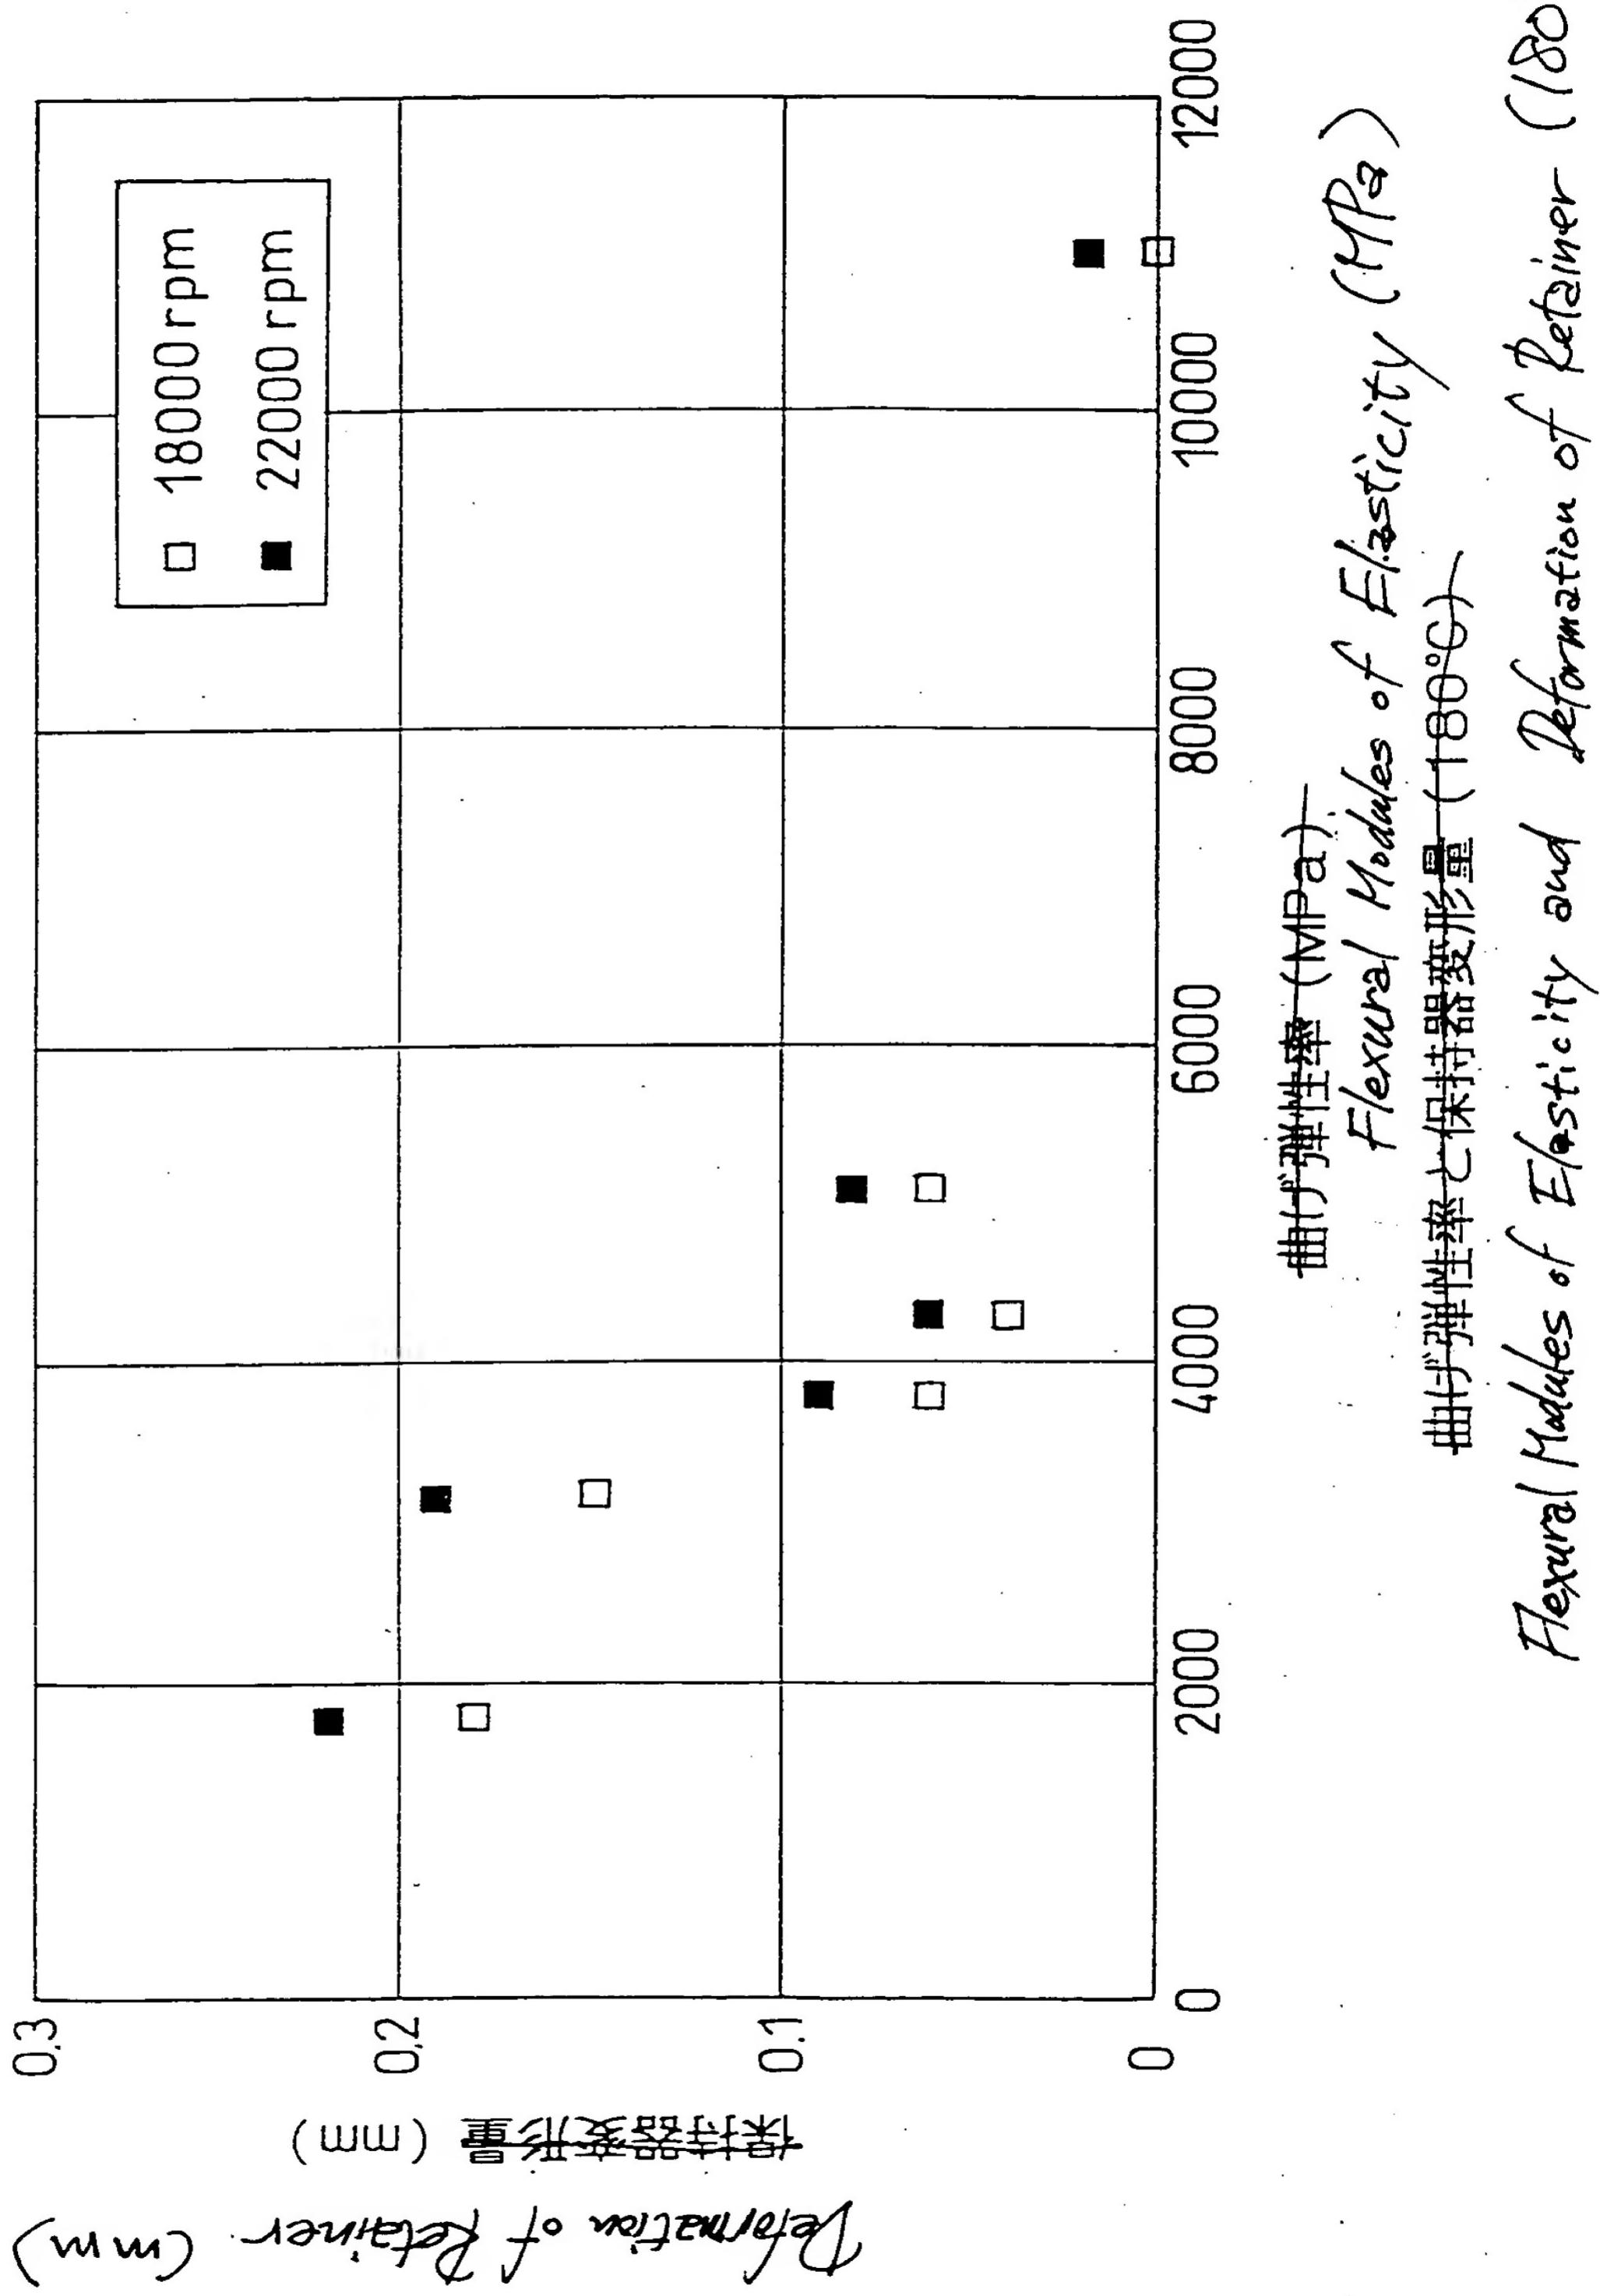


Fig. 6

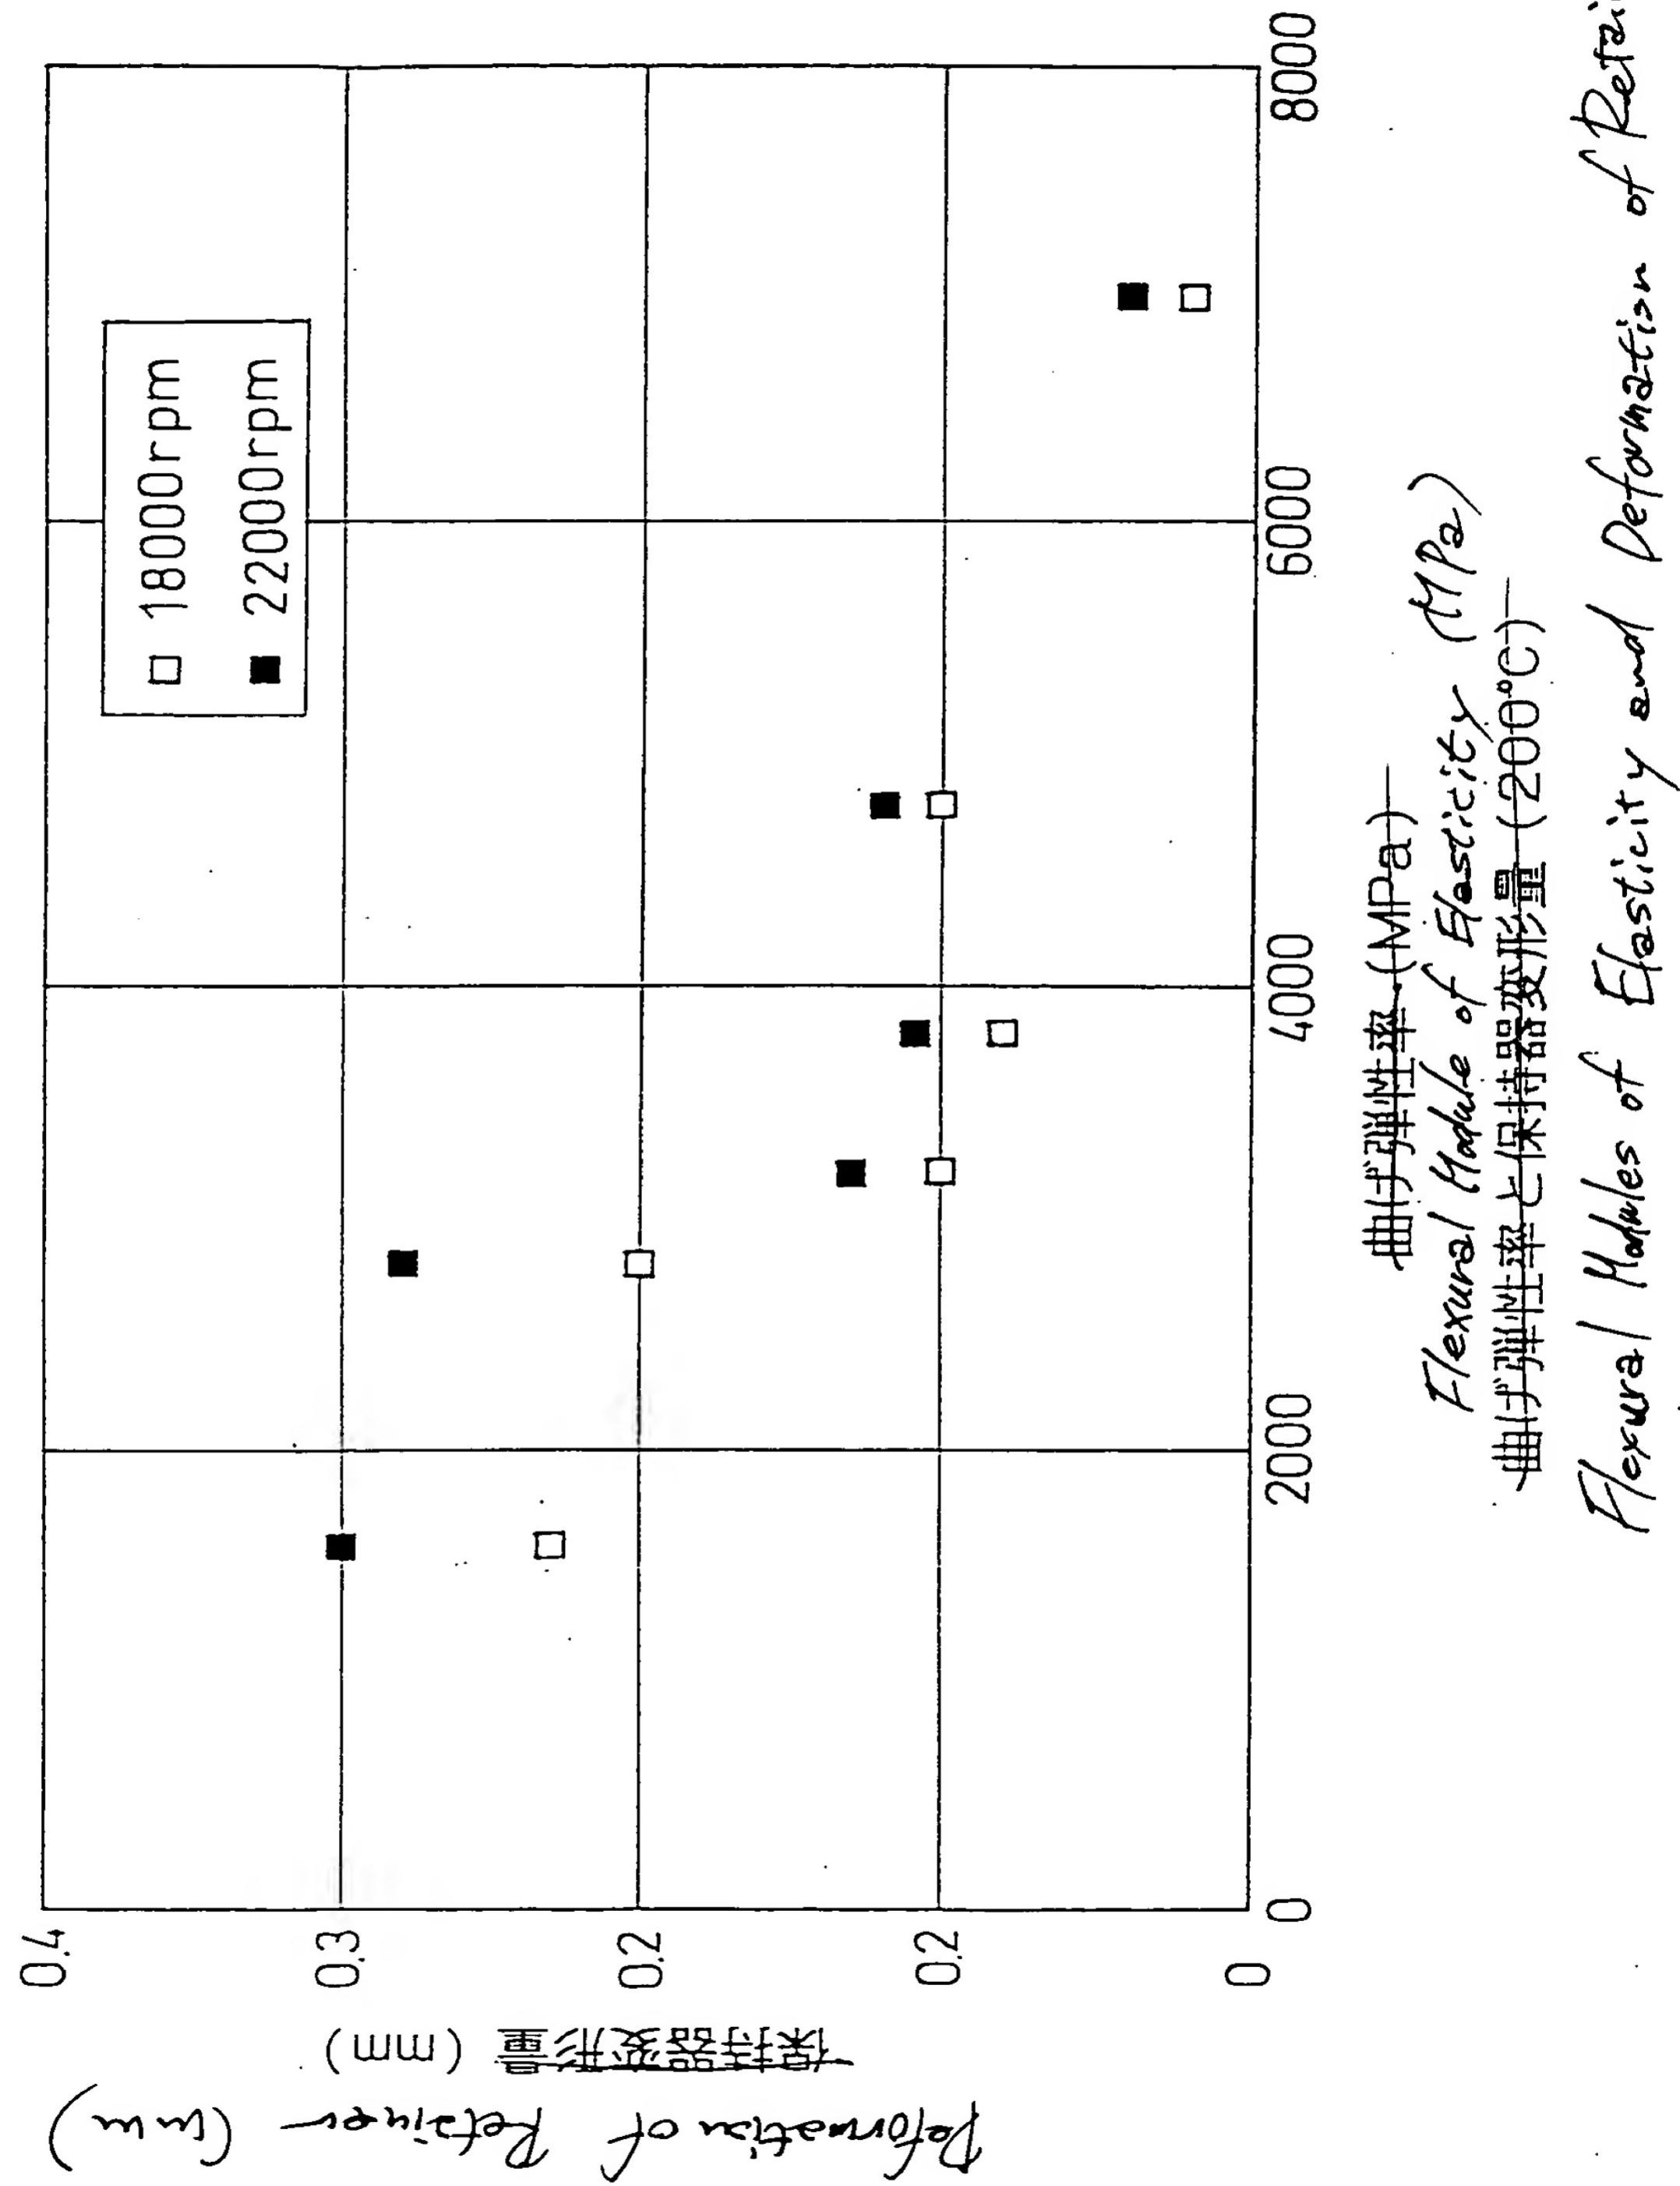

[REDACTED] 71

Fig. 7

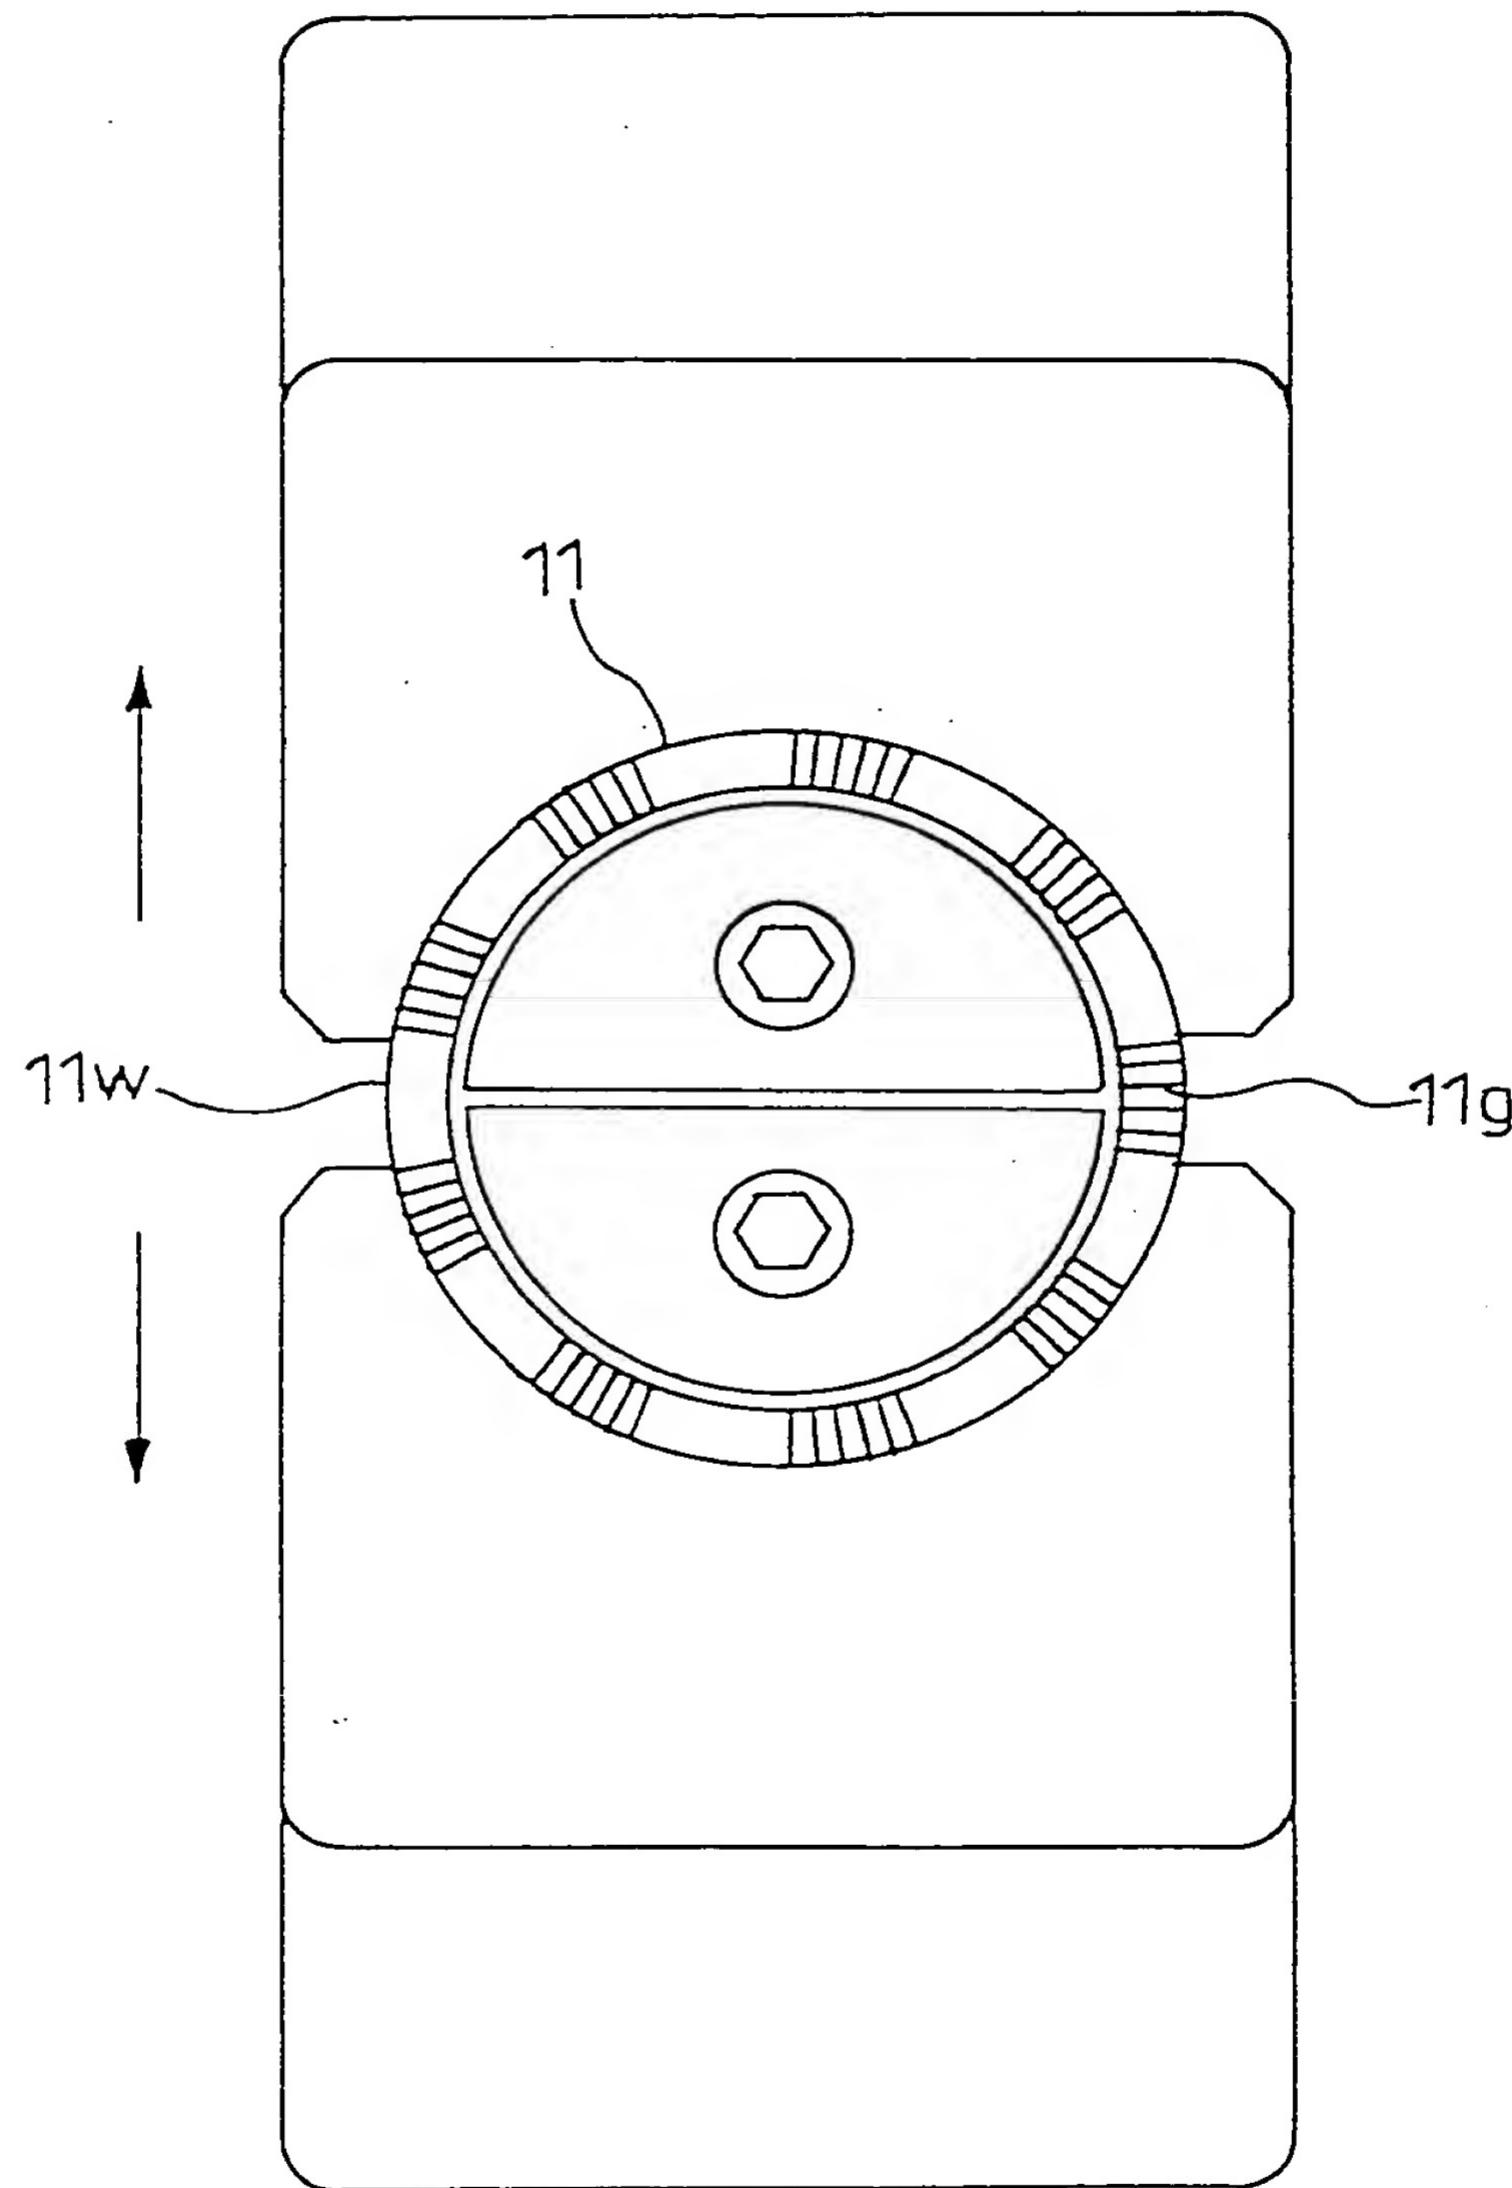

20050200 "56+1861260

図 8

FIG. 8 " 図 8 "

Percent retention of circular tensile strength (%)

円環引張強度保持率 (%)

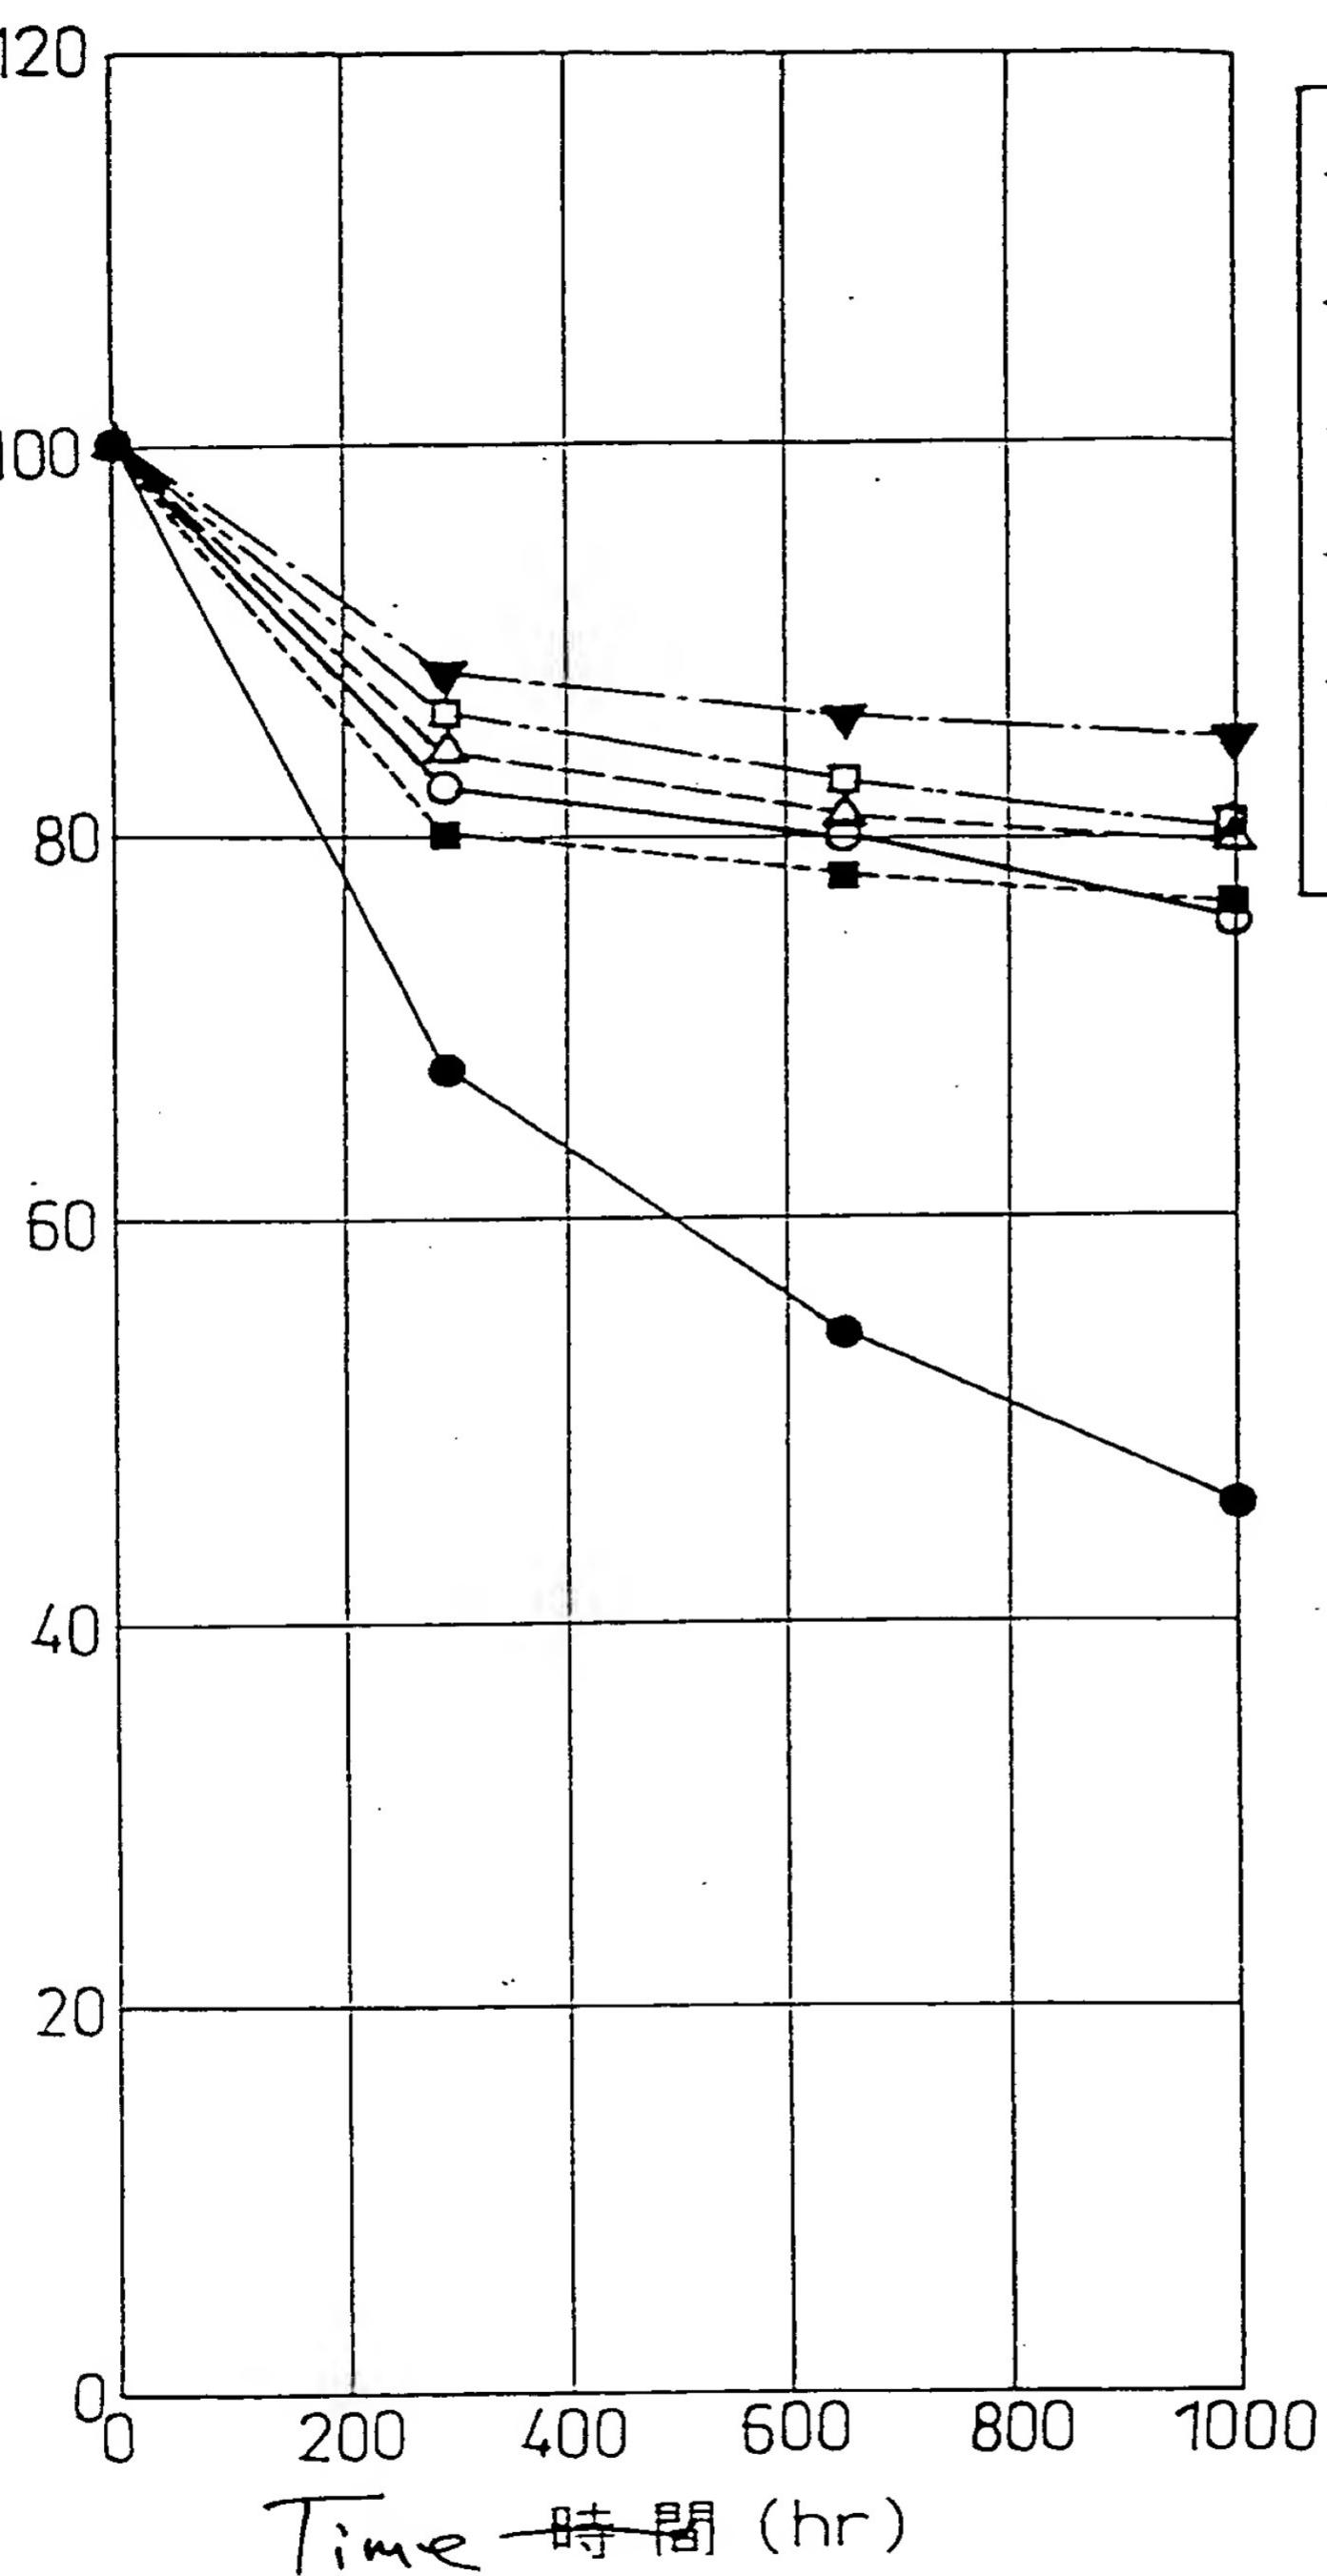


Fig. 8

保持器の耐熱性 (170°C)

Heat resistance of Retainer (170°C)

Ex. 1
Ex. 2
Ex. 3
Ex. 4
Comp. Ex. 1
Comp. Ex. 2


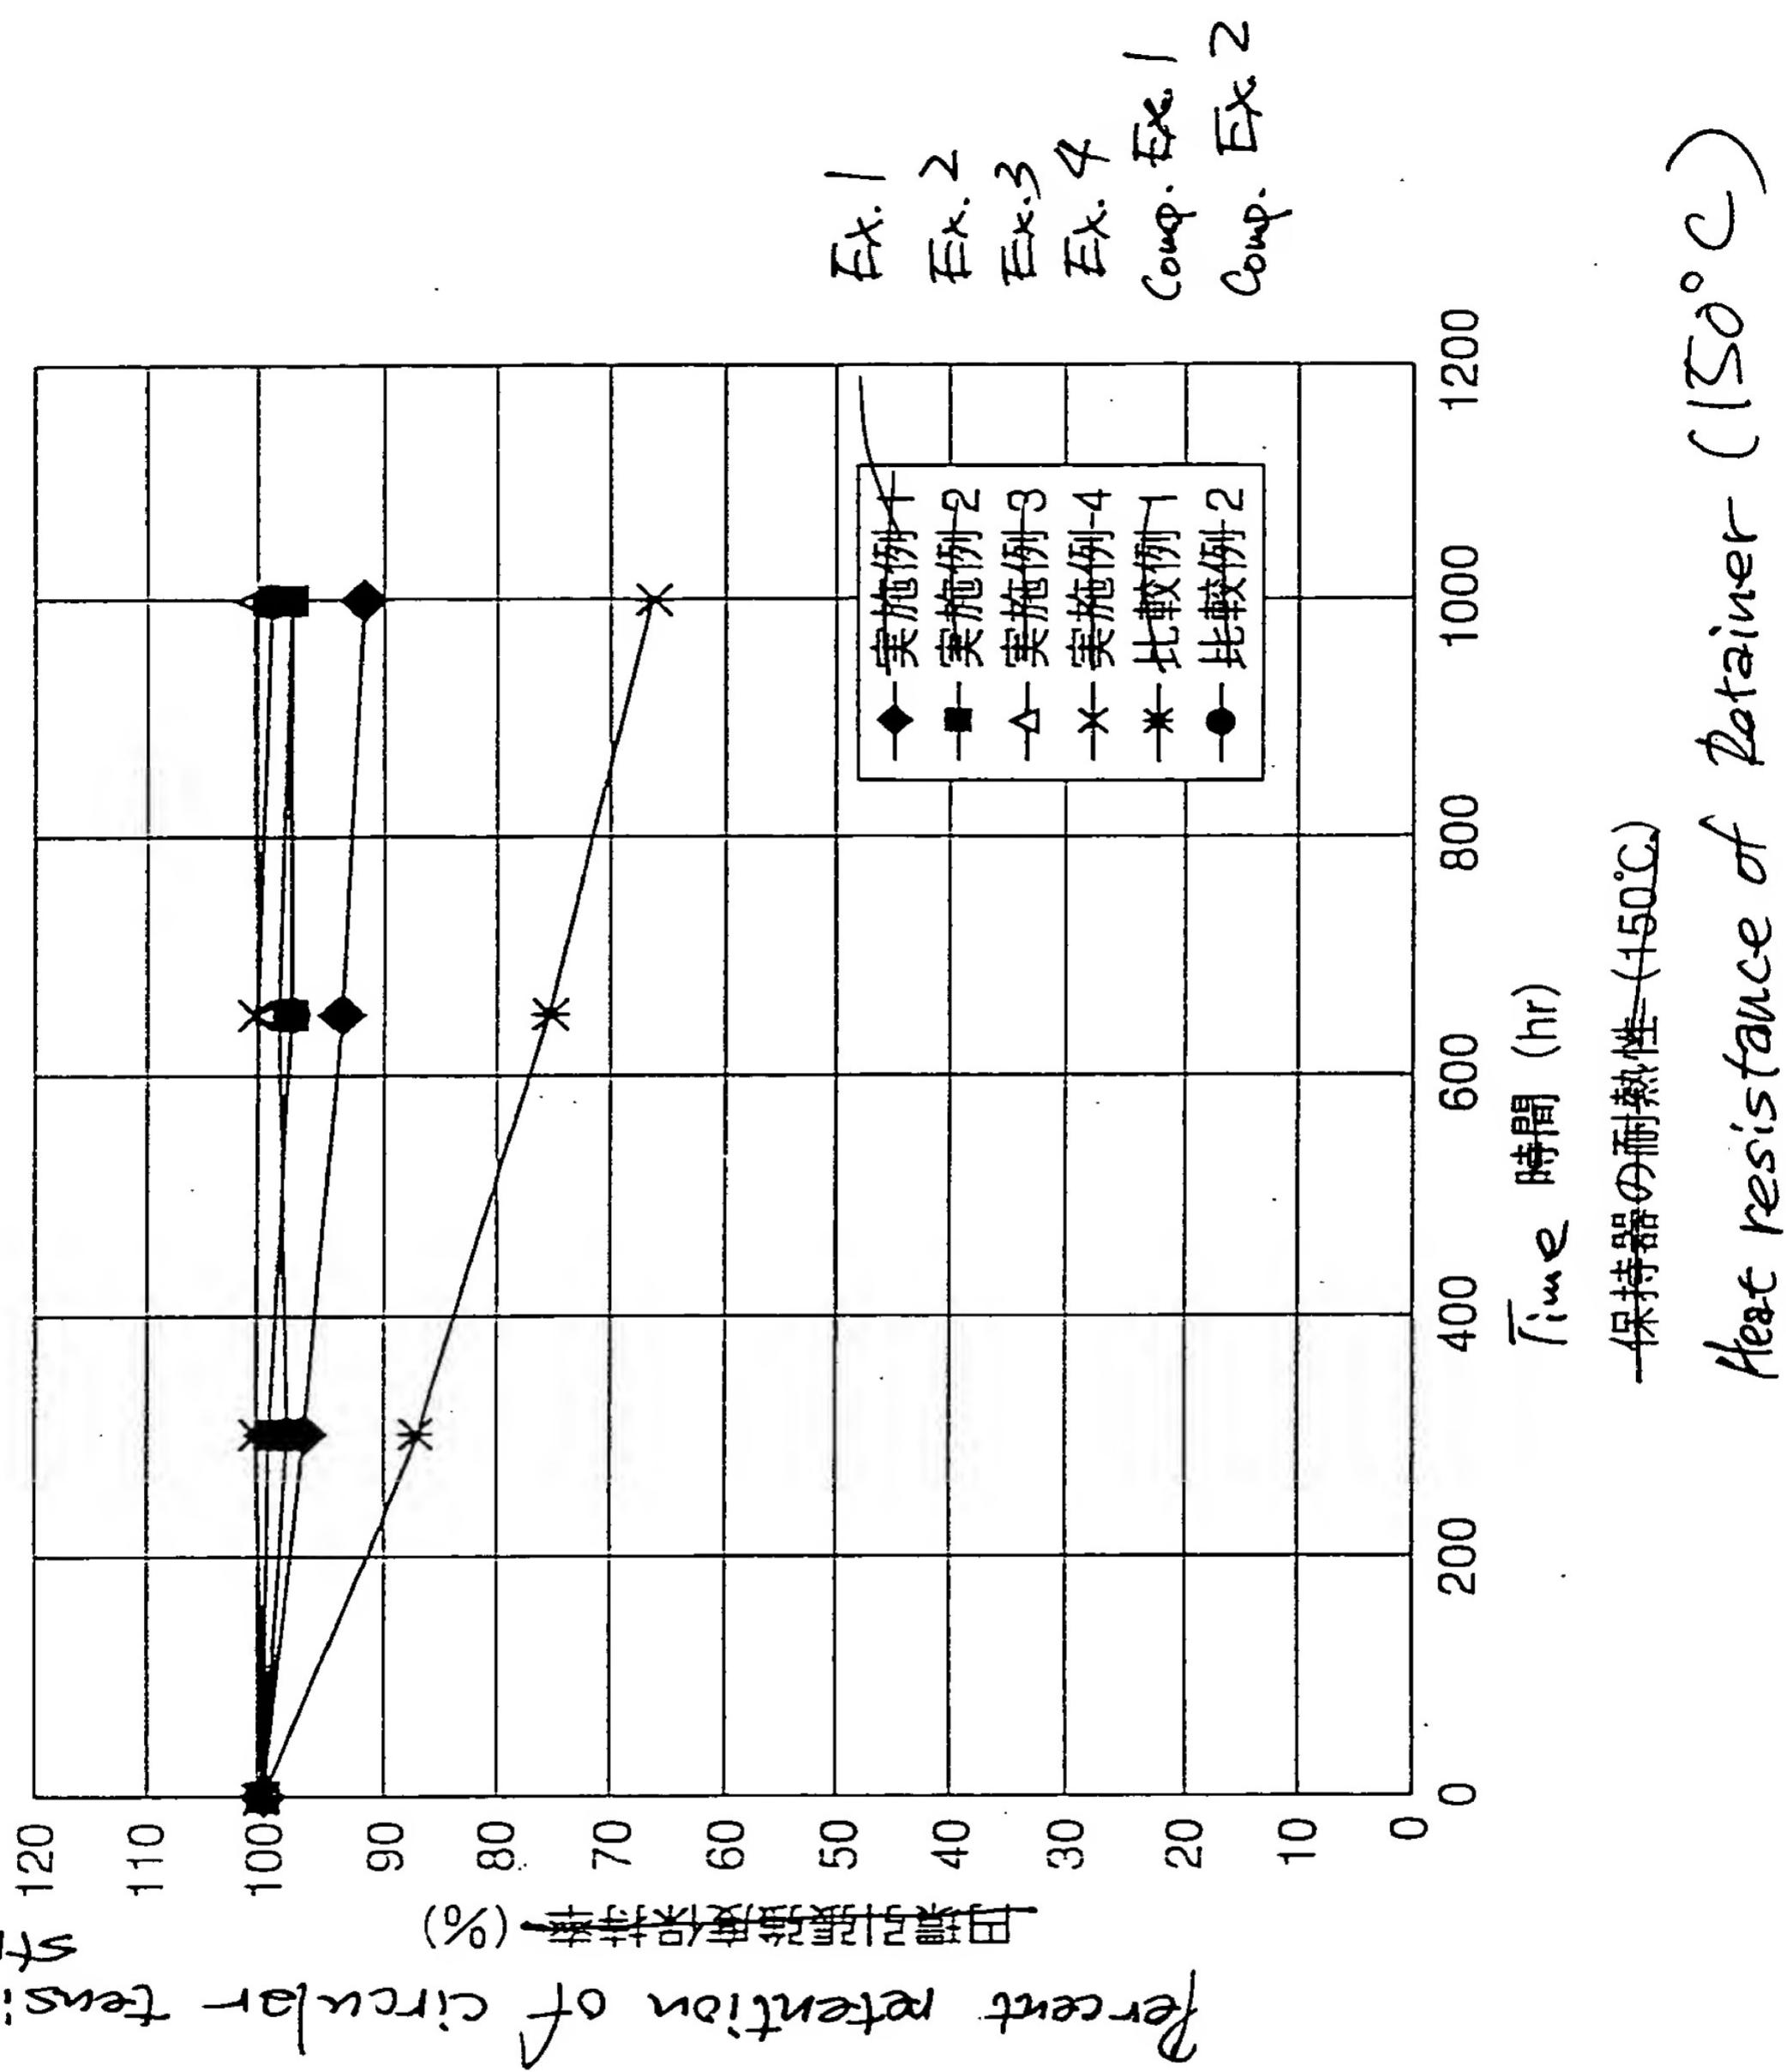


図10

Fig. 10

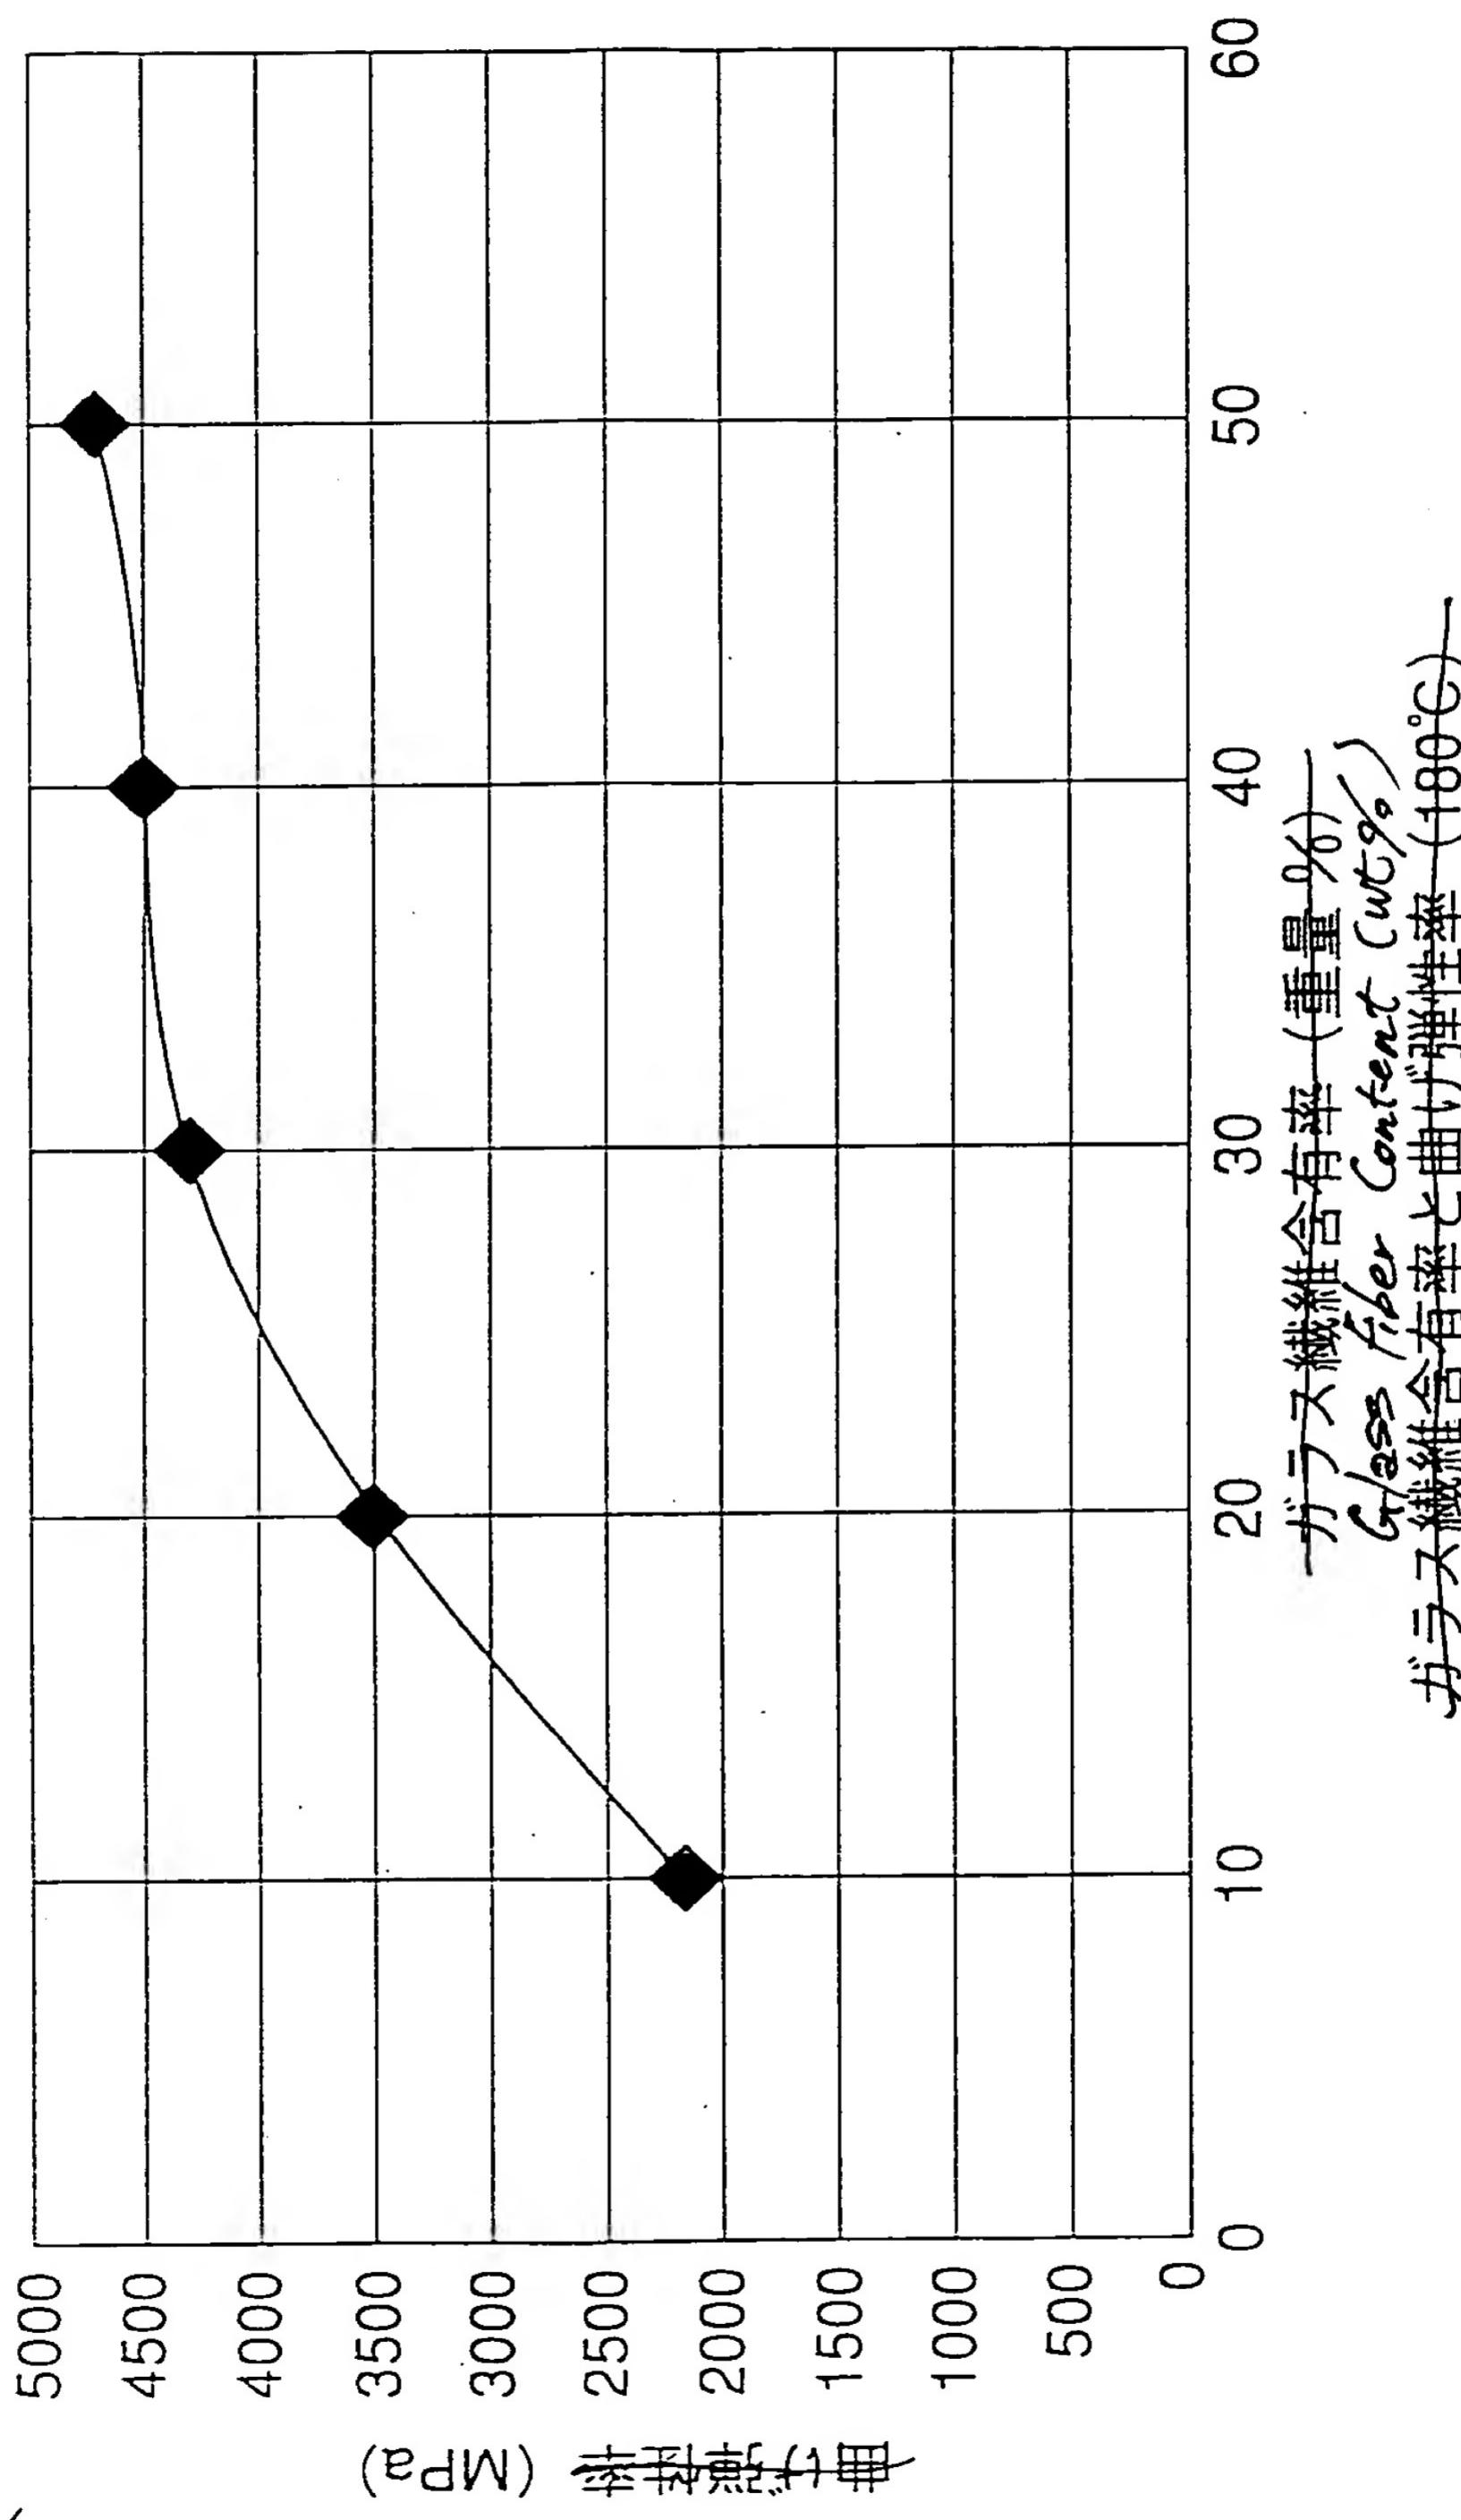

Flexural module of elasticity (MPa)


Glass fiber Content (%)
ガラス繊維含有率(重量%)
ガラス繊維含有率と曲げ弾性率(180°C)

Glass fiber Content (wt%)
Glass fiber Content (180°C)

Glass fiber Content (%)
ガラス繊維含有率(重量%)
ガラス繊維含有率と曲げ弾性率(180°C)


Flexural module of elasticity (MPa)

Fig. 11

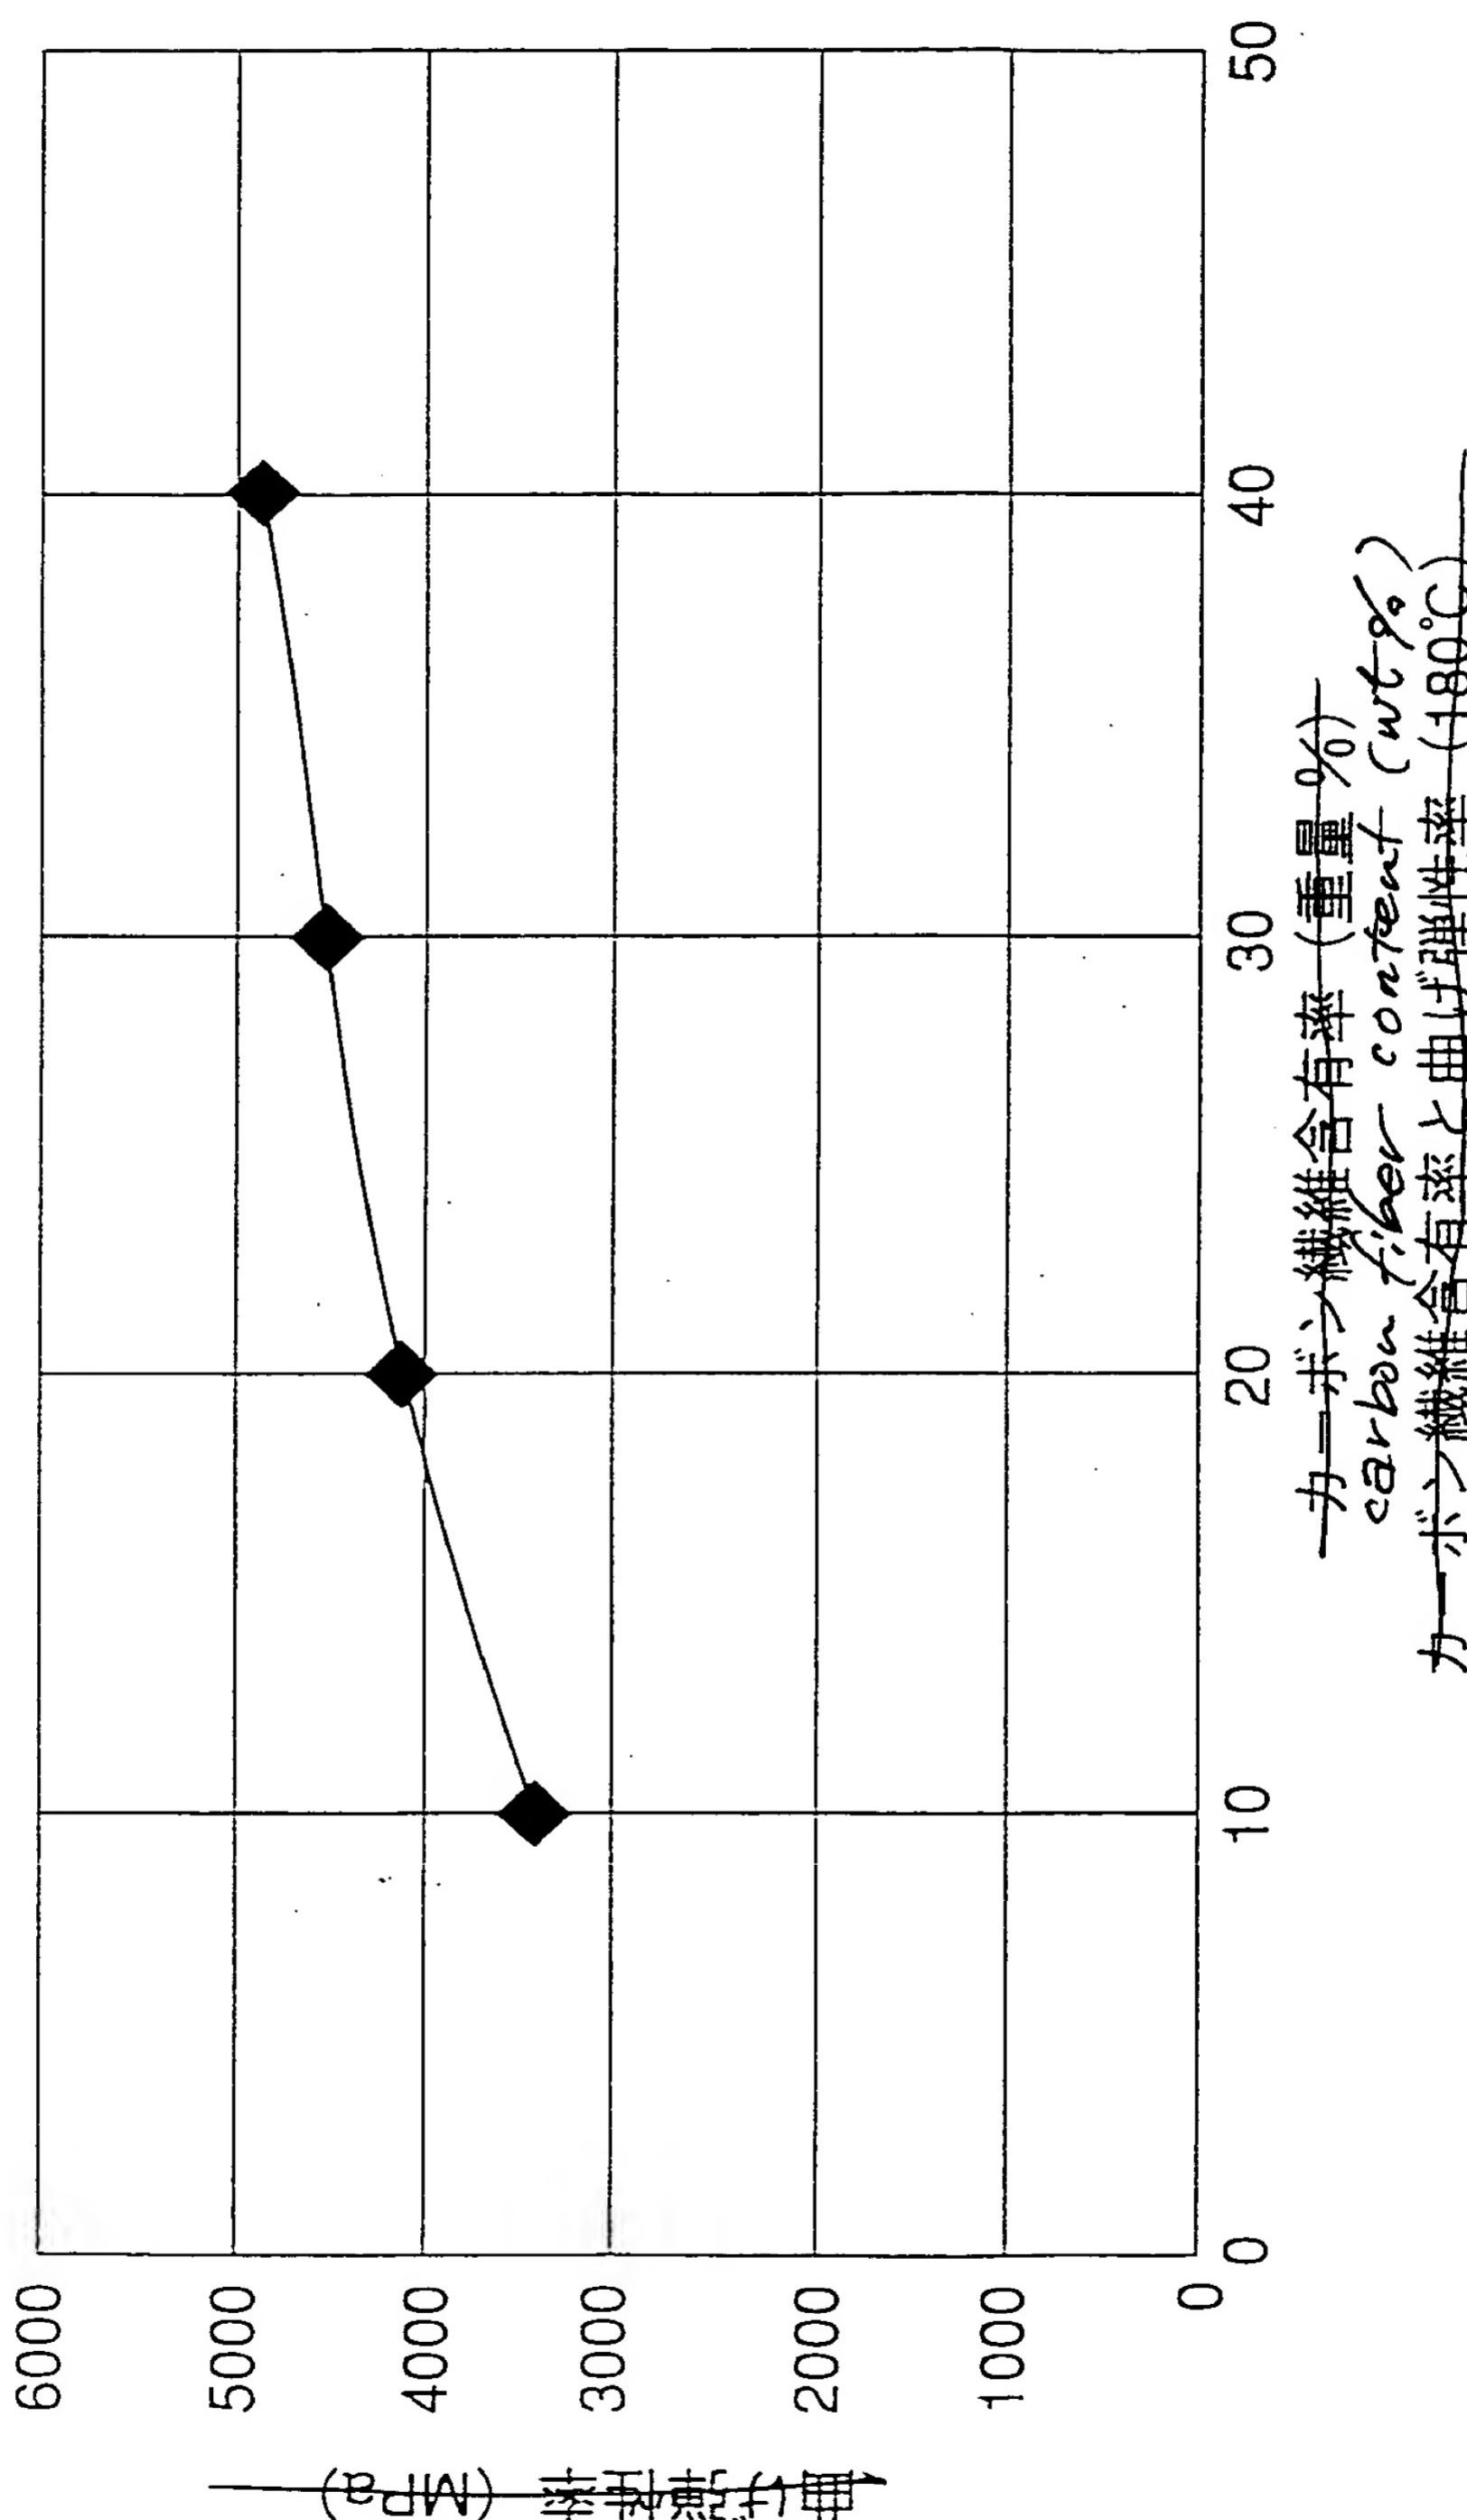

Carbon fiber content and Flexural module of elasticity (180°C)


Fig. 12

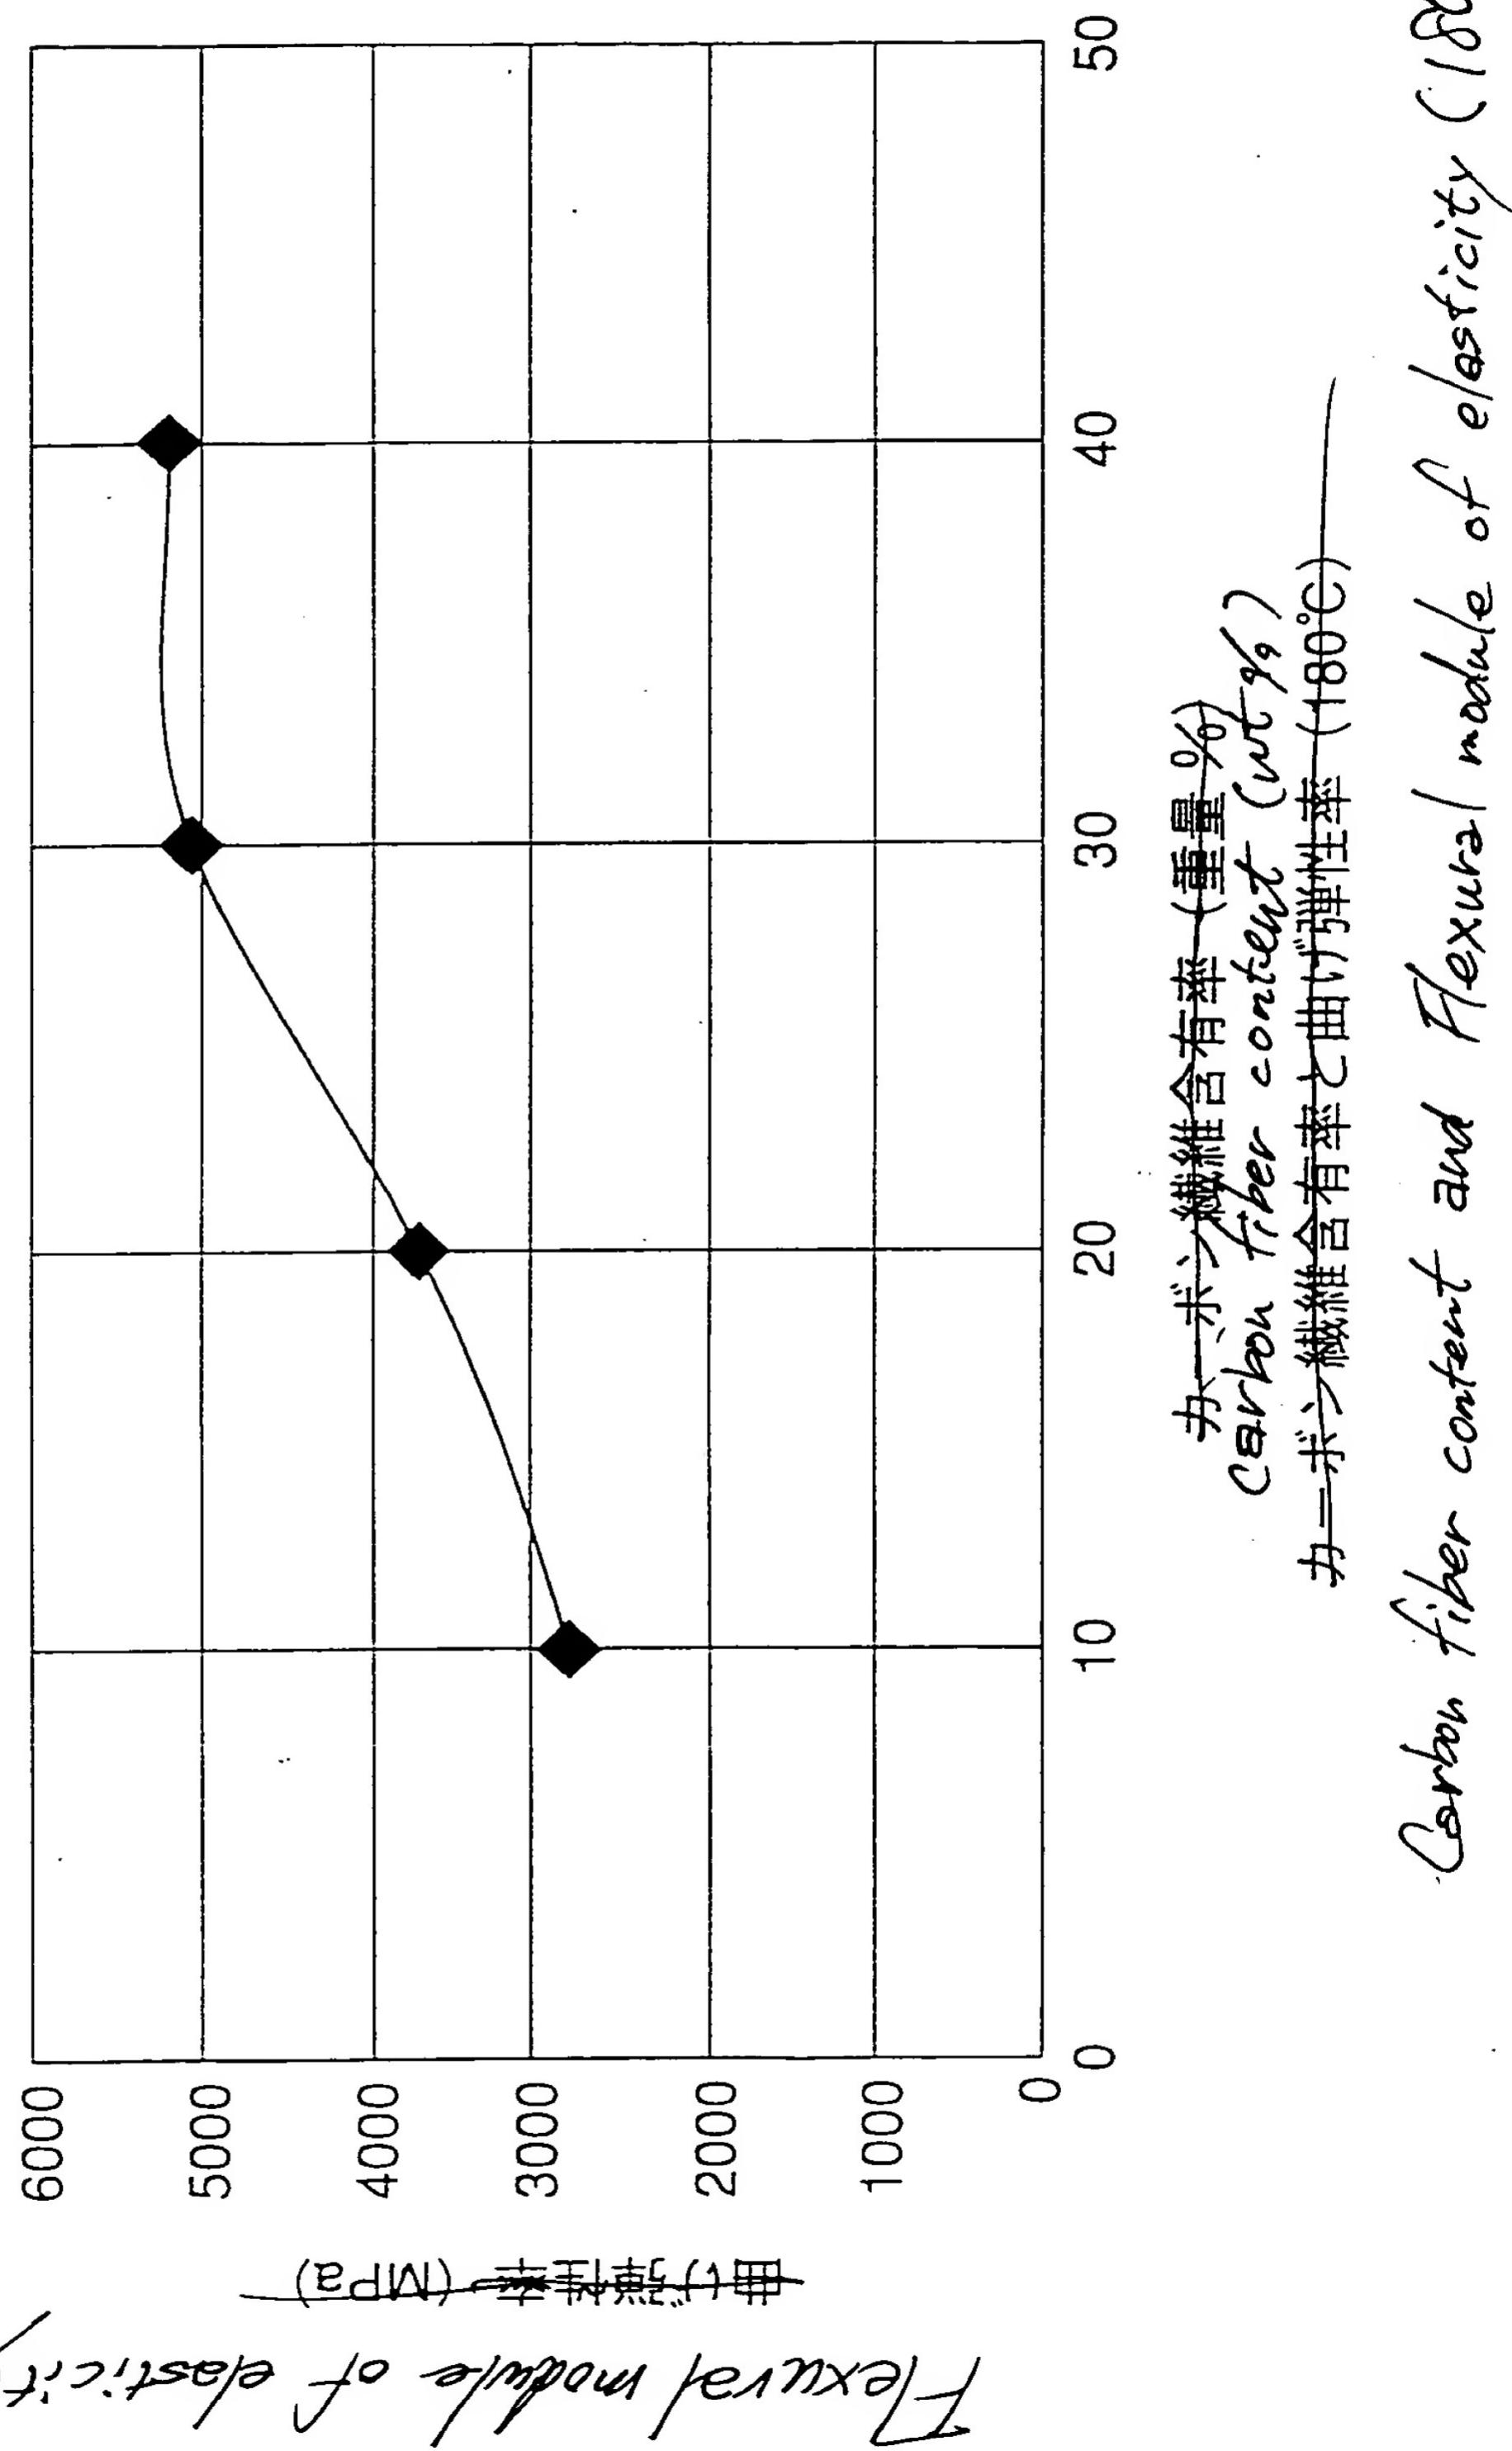

Carbon fiber content and Flexural module of elasticity (180°C)

[図13]

Fig. 13

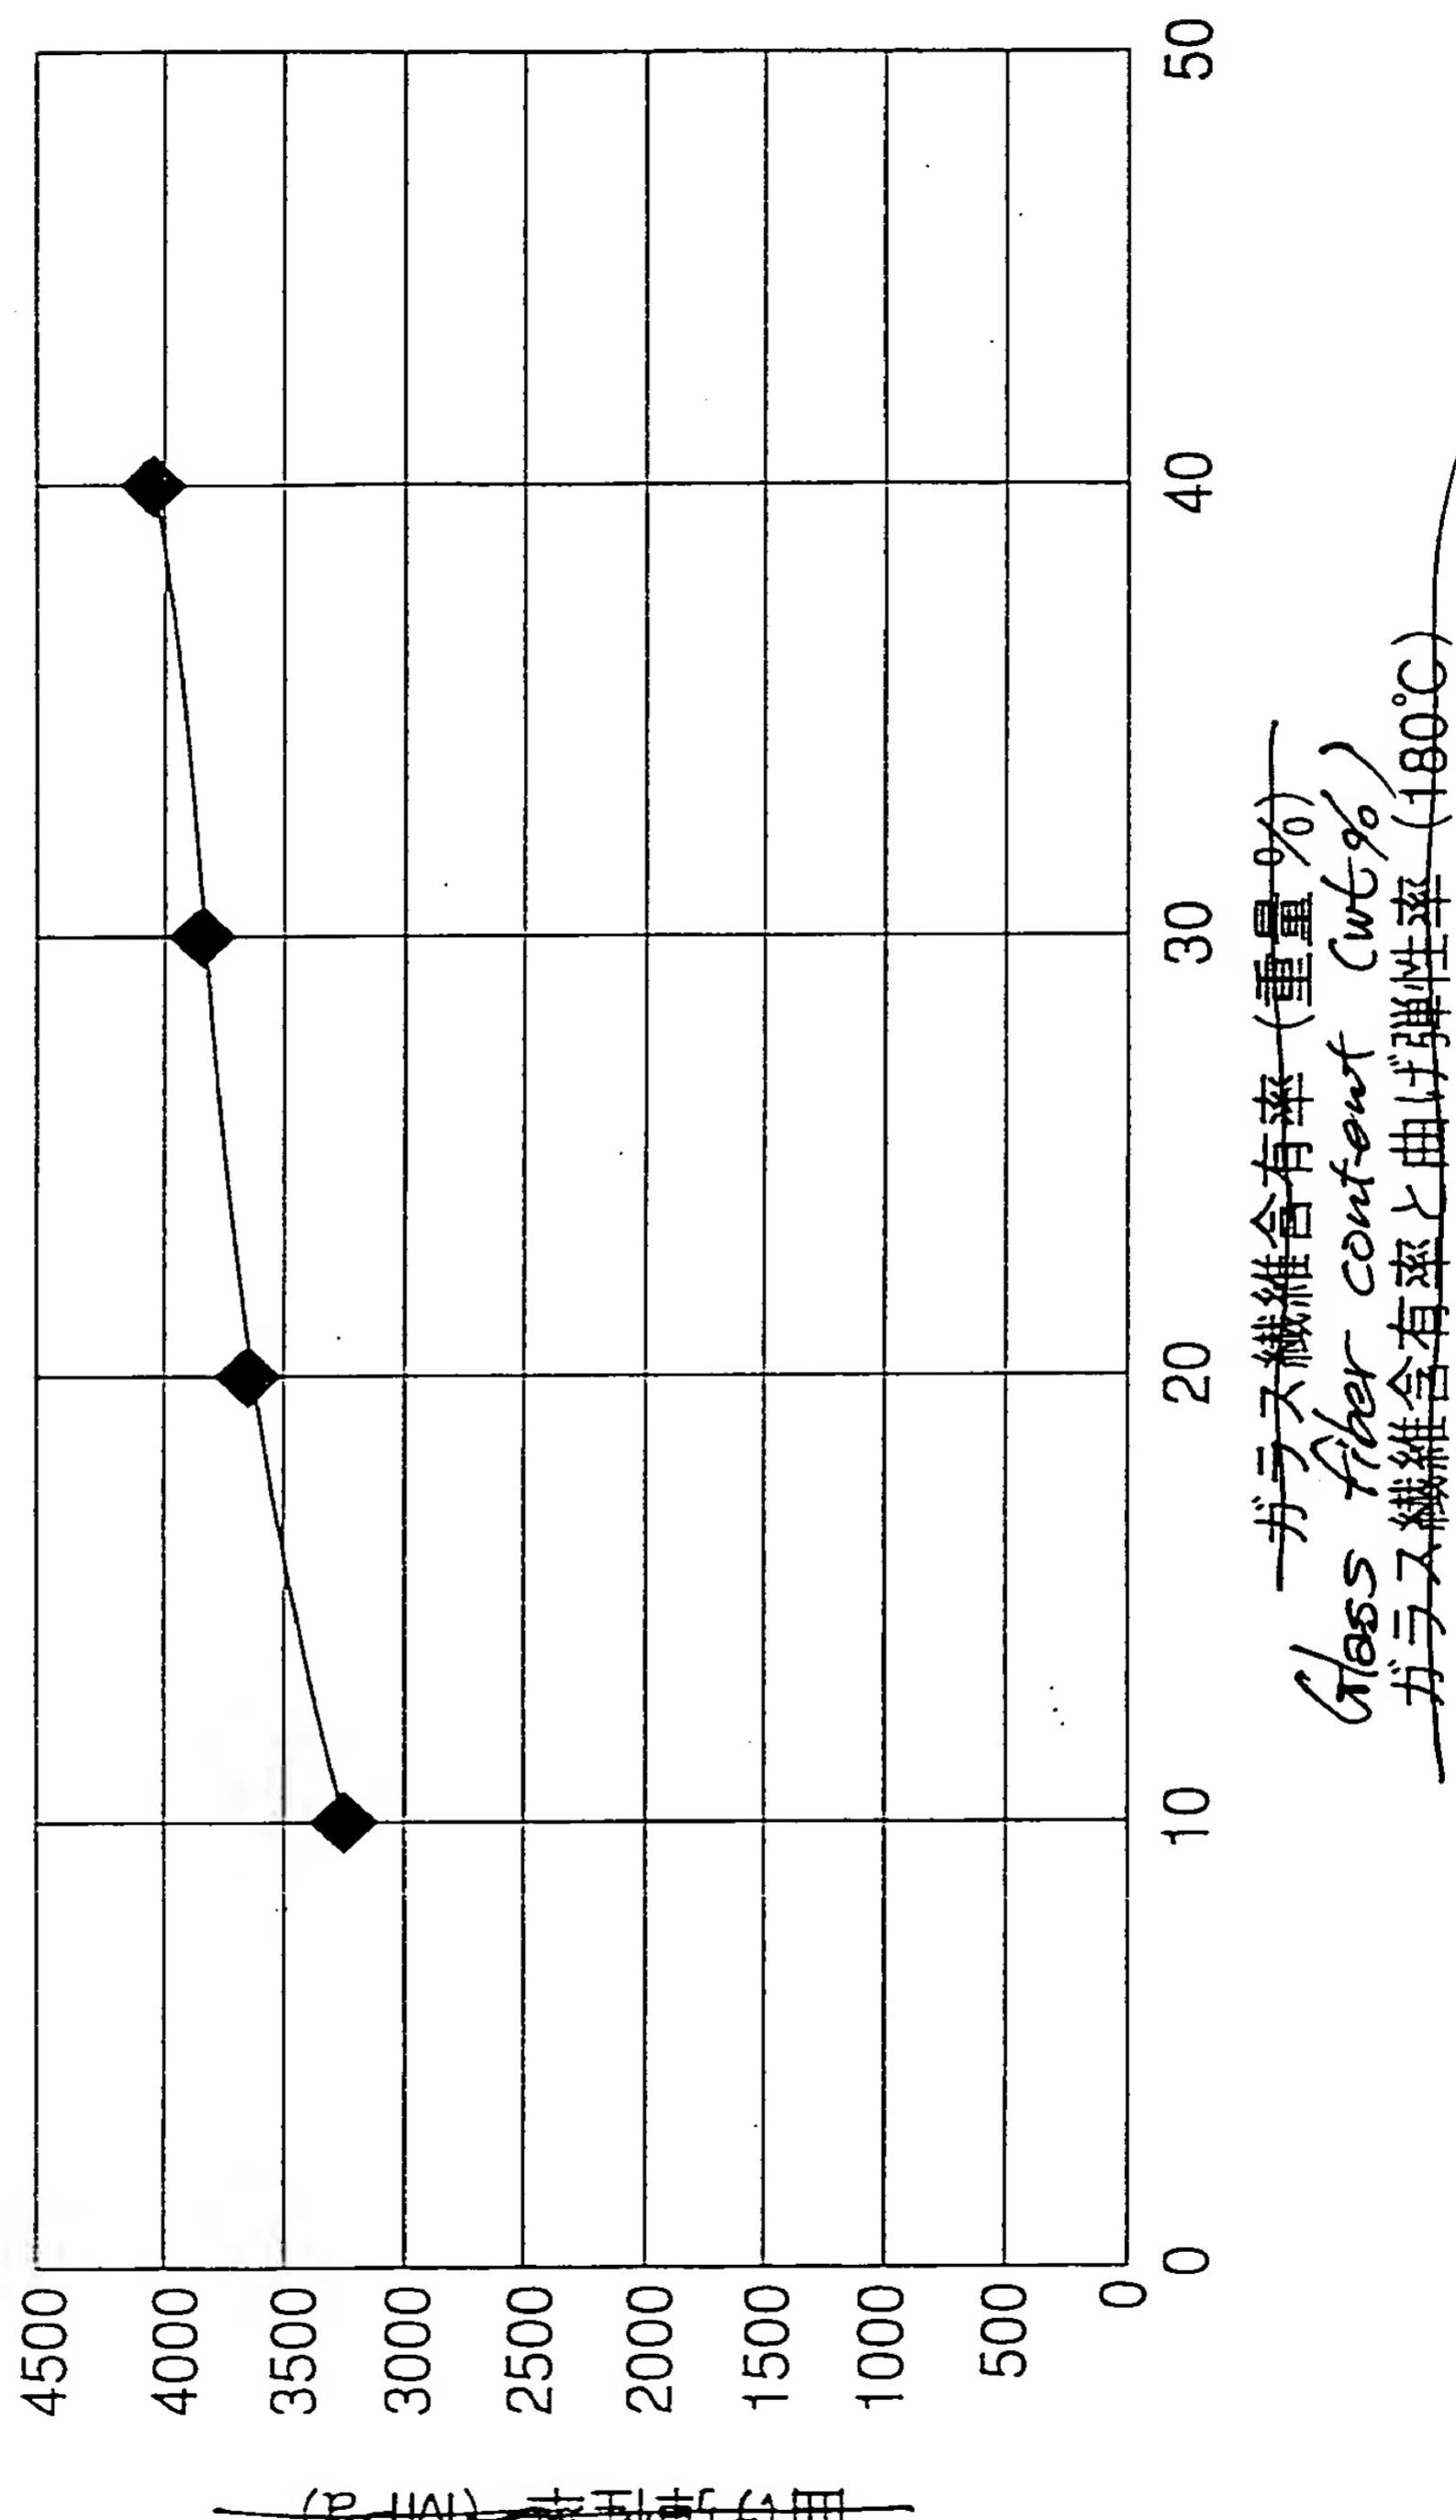

~~柔軟性率 (180°C)~~

ガラス繊維含有率 (重量 %)
Glass fiber content (wt%)
ガラス繊維含有率と曲げ弾性率 (180°C)


Glass fiber content and Flexural module of elasticity (180°C)

FIGURE 4
Fig. 4

HAMAMOTO, et al
ROLLING BEARING
Filed: July 5, 2001
Darryl Mexic 202-293-7060
14 of 14

Q65333

(14)

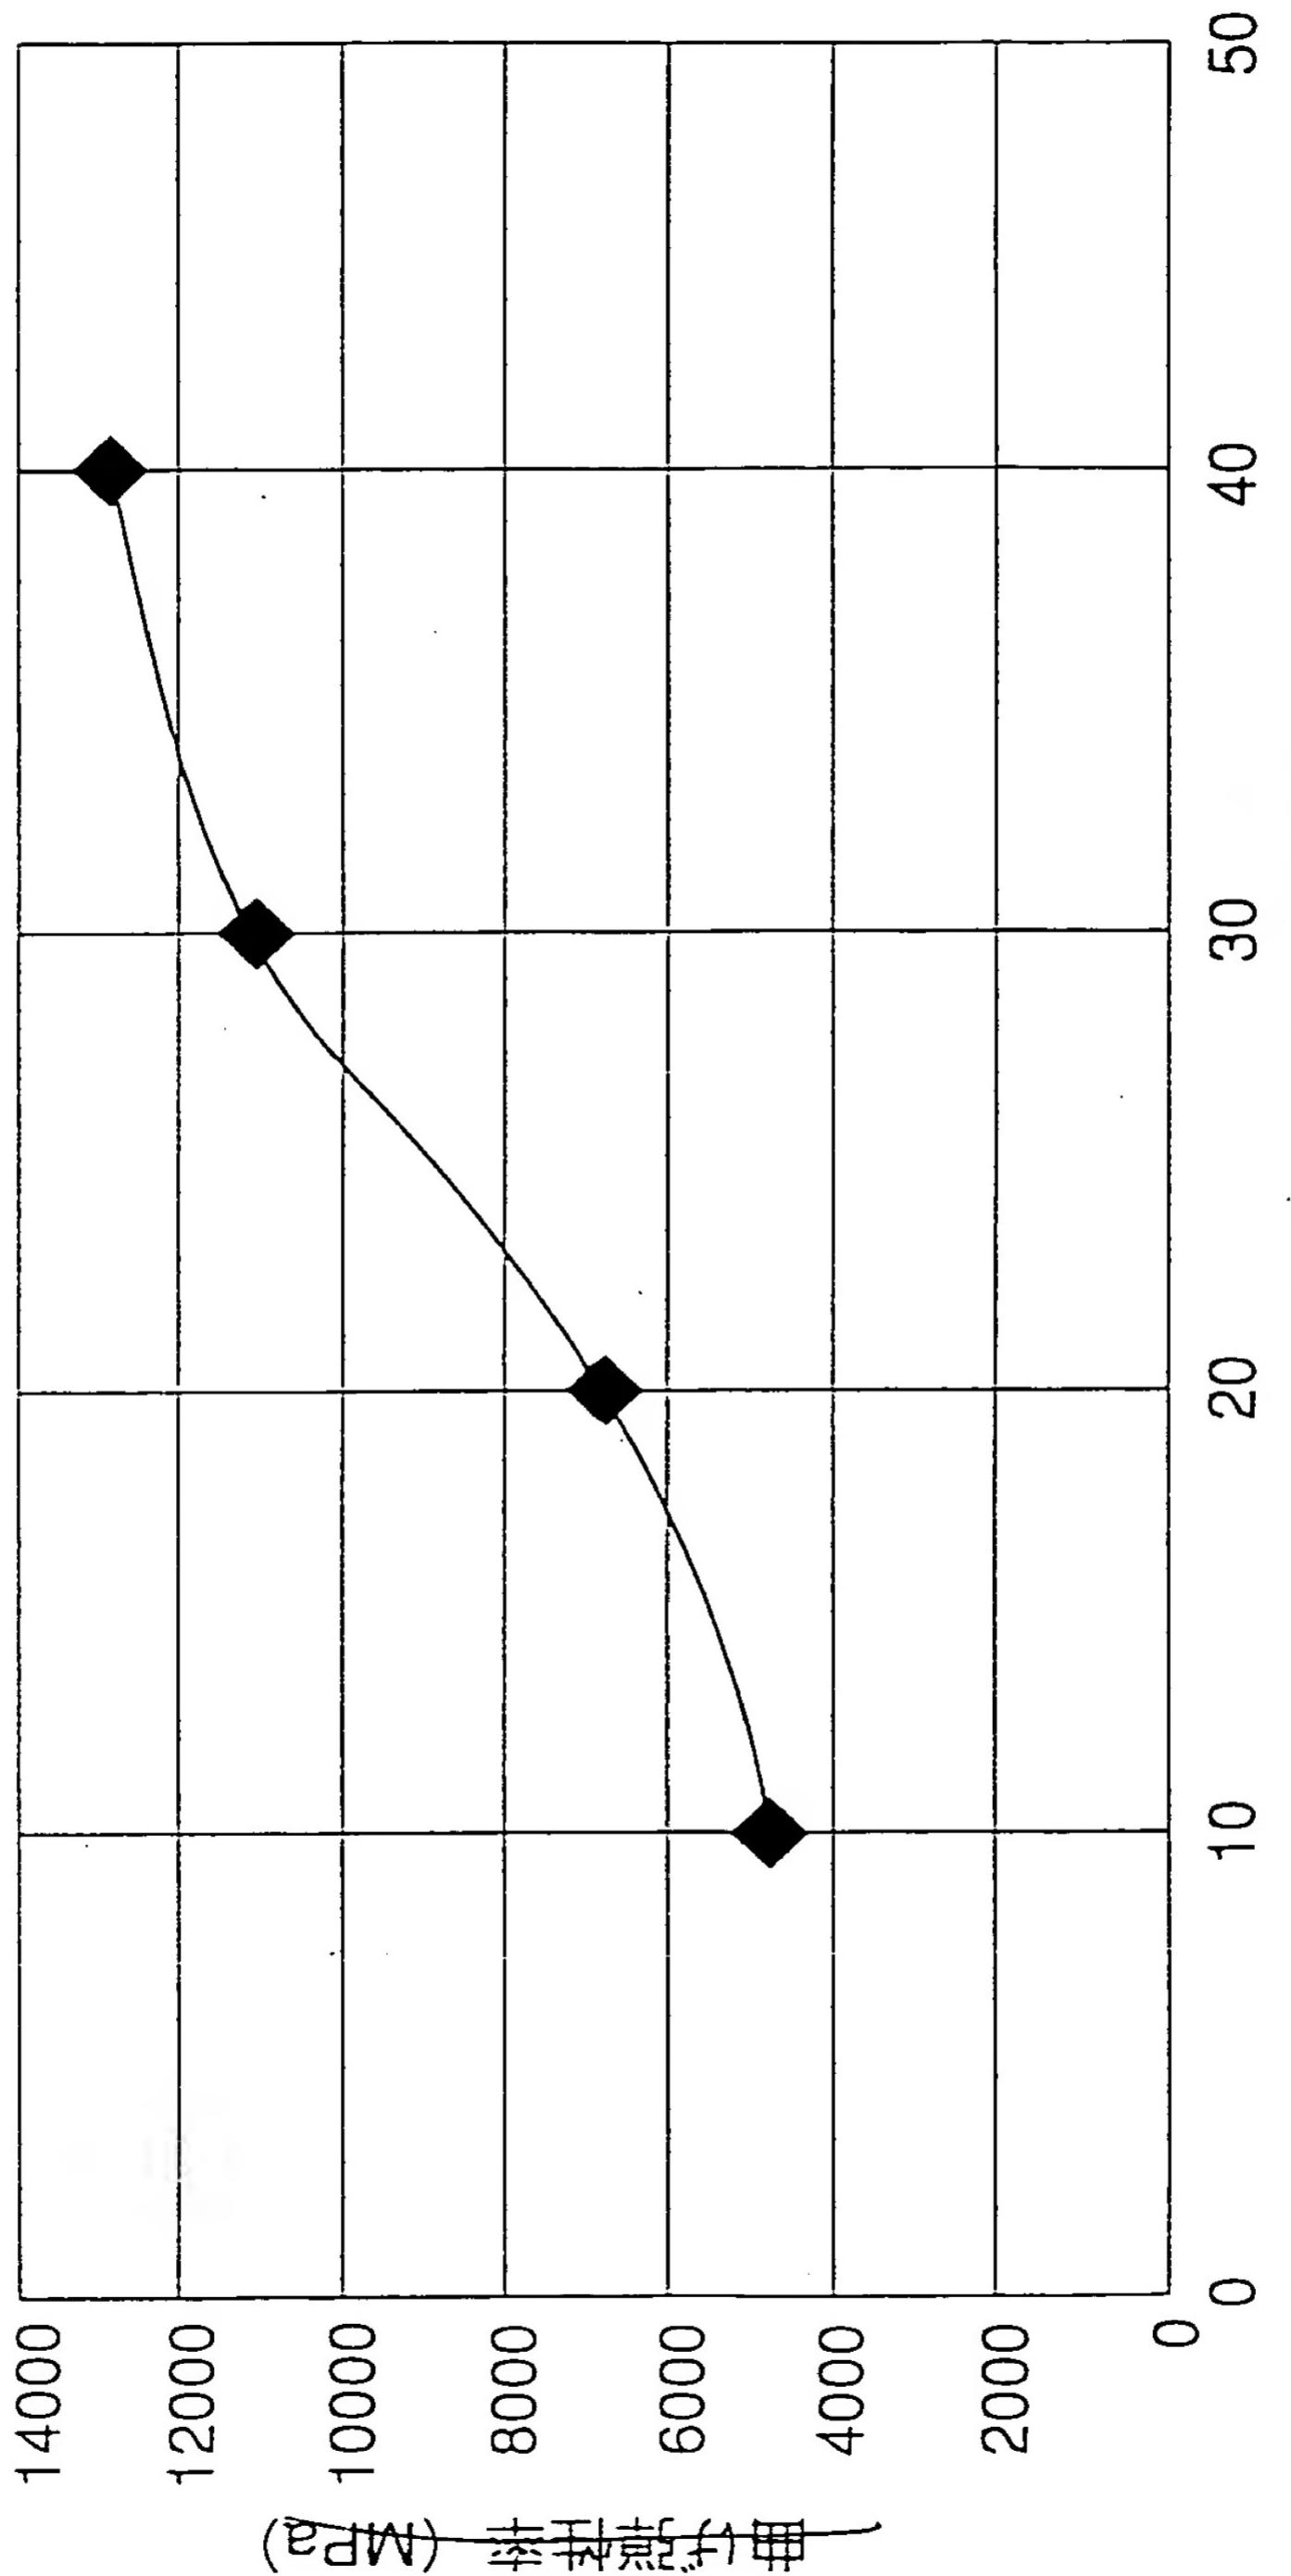

Flexural module of elasticity (MPa)

力 = 繊維含有率 (重量%)
Carbon fiber content (wt %)
力 = 繊維含有率と曲げ弾性率 (180°C)
Carbon fiber content and T/flexural modulus of elasticity (180°C)